


Fast Acting Glass Tube Fuse

Part No. **1102** series



- Fast Acting Glass Tube Fuses
- Element: Silver Alloy / Zinc Alloy
- 6.3 ϕ x 32 mm (1/4 x 1-1/4 Inch)
- Ampere Rating: 0.5 – 35 A
- Caps: Brass With Nickel Plating
- Voltage Rating: 250V and Less
- Body: Glass Tube
- Standards: UL & CSA 248-14

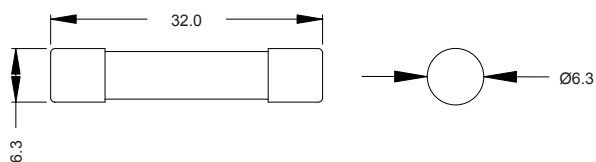

Scale: mm

Specifications

Opening Time / Pre-arcing Time:

In	1.0 In	1.35 In	2.0 In
0.5 - 35A	> 4 Hours	Max.	Max.
		1 Hour	10 s

Ordering Information:

Part No.	Ampere (A)	Voltage (V)	Cold Resistance Ω	Voltage Drop Max. (mV)	Breaking Capacity AC	I ² t Min. (A ² S)
11020500200	500 m A	250 V	0.49	650	35A 250V	0.48
11020600200	600 m A	250 V	0.36	600	35A 250V	0.88
11020750200	750 m A	250 V	0.24	500	35A 250V	0.81
11021100200	1 A	250 V	0.19	470	35A 250V	0.75
11021125200	1.25 A	250 V	0.14	450	100A 250V	1.50
11021160200	1.6 A	250 V	0.093	420	100A 250V	3.00
11021200200	2 A	250 V	0.070	400	100A 250V	5.00
11021250200	2.5 A	250 V	0.050	360	100A 250V	9.20
11021300200	3 A	250 V	0.042	340	100A 250V	13.00
11021400200	4 A	250 V	0.029	320	200A 250V	29.00
11021500200	5 A	250 V	0.022	300	200A 250V	50.00
11021600200	6 A	250 V	0.018	290	200A 250V	80.00
11021630200	6.3 A	250 V	0.016	285	200A 250V	120.00
11021800200	8 A	250 V	0.012	270	200A 250V	155.00
11022100200	10 A	250 V	0.0093	250	200A 250V	280.00
11022120200	12 A	250 V	0.007	240	300A 32V	410.00
11022150200	15 A	250 V	0.005	230	300A 32V	480.00
11022200200	20 A	250 V	0.003	200	300A 32V	2000.00
11022250200	25 A	250 V	0.0025	180	300A 32V	3800.00
11022300200	30 A	250 V	0.0018	160	300A 32V	5500.00
11022350200	35 A	250 V	0.0013	150	300A 32V	6800.00