


Normal Blow 5AG Glass Tube Fuse

Part No. **11111111** series *With Indicator (LED)*



- Normal Blow Glass Tube Fuses
 - 10.3ø x 38.1mm (13/32 x 1-1/2 Inch)
 - Caps: Brass With Gold Plating
 - Body: Glass Tube
 - Element: Zinc Alloy With Indicator (LED)
 - The illuminative design is easy to identify if the fuse blew out
(*Battery with power, Keep the switch/key in "ON" position*)
 - Once the over-current flow to the circuit cause the fuse blew out and the LED illuminated
 - Easy for DIY replacement
- Standards: UL & CSA 248-14
 - Ampere Rating: 10-70A
 - Voltage Rating: 32V

Option: Gold Plated Element Available Part No. **1540** Series

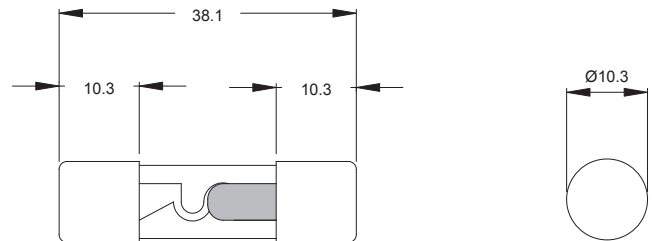

Scale: mm

Specifications

Opening Time / Pre-arcing Time:

In	1.0 In	1.35 In	2.0 In
10-70A	> 4 Hours	Max.	Max.
		1 Hour	30 s

Ordering Information:

Part No.	Ampere (A)	Voltage (VDC)
11112100200	10 A	32 V
11112120200	12 A	32 V
11112150200	15 A	32 V
11112200200	20 A	32 V
11112250200	25 A	32 V
11112300200	30 A	32 V
11112350200	35 A	32 V
11112400200	40 A	32 V
11112450200	45 A	32 V
11112500200	50 A	32 V
11112600200	60 A	32 V
11112700200	70 A	32 V

Ordering Information: Gold Plated Element

Part No.	Ampere (A)	Voltage (VDC)
15402100200	10 A	32 V
15402120200	12 A	32 V
15402150200	15 A	32 V
15402200200	20 A	32 V
15402250200	25 A	32 V
15402300200	30 A	32 V
15402350200	35 A	32 V
15402400200	40 A	32 V
15402450200	45 A	32 V
15402500200	50 A	32 V
15402600200	60 A	32 V
15402700200	70 A	32 V