


Slow Blow Glass Tube Fuse

Part No. **1114** series

- Slow Blow Glass Tube Fuses
- 5ø x 20 mm (0.197 x 0.787 Inch)
- Caps: Brass With Nickel Plating
- Body: Glass Tube
- Standards: UL & CSA 248-14

- Element: Silver Alloy
- Ampere Rating: 0.5 – 25 A
- Voltage Rating: 250V and Less

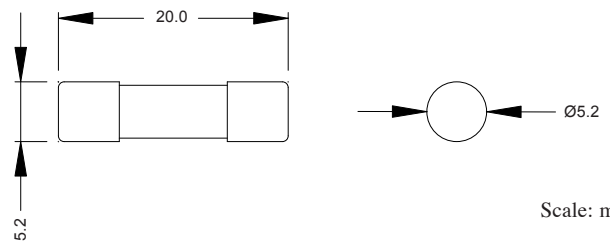

Specifications

Opening Time / Pre-arcing Time:

In	1.0 In	1.35 In	2.0 In	
0.5 - 25A	Carry	Max.	Min.	Max.
		1 Hr	3 s	120 s

Ordering Information:

Part No.	Ampere (A)	Voltage (V)	Cold Resistance Ω	Voltage Drop Max. (mV)	Breaking Capacity AC	I ² t Min. (A ² S)
11140500200	500 mA	250 V	1.30	650	35A 250V	1.6
11140630200	630 mA	250 V	0.825	520	35A 250V	2.9
11140800200	800 mA	250 V	0.5	400	35A 250V	5.6
11141100200	1 A	250 V	0.35	350	35A 250V	9.5
11141125200	1.25 A	250 V	0.24	300	100A 250V	15
11141160200	1.6 A	250 V	0.169	270	100A 250V	25
11141200200	2 A	250 V	0.117	235	100A 250V	46
11141250200	2.5 A	250 V	0.086	215	100A 250V	83
11141300200	3 A	250 V	0.067	200	100A 250V	110
11141315200	3.15 A	250 V	0.064	200	100A 250V	140
11141400200	4 A	250 V	0.045	180	200A 250V	160
11141500200	5 A	250 V	0.035	175	200A 250V	210
11141600200	6 A	250 V	0.023	138	200A 250V	390
11141630200	6.3 A	250 V	0.022	138	200A 250V	435
11141800200	8 A	250 V	0.009	75	200A 250V	480
11142100200	10 A	250 V	0.0058	58	200A 250V	650
11142120200	12 A	250 V	0.0048	58	400A 250V	1250
11142150200	15 A	250 V	0.0037	55	400A 250V	2100
11142200200	20 A	250 V	0.0032	55	400A 250V	3600
11142250200	25 A	250 V	0.0022	55	400A 250V	6200