





Part No. **1304** series

Horizontal Type



- Slow Blow (T), Surge Withstand
- Size: 20(L) x 10(W) x 12.5 (H)mm
- Voltage: 250V and Less
- Material: * Insulating Body: Fiberglass Reinforced Plastic, UL94V0 Flame Resistant
- * Element: Silver Alloy
- * Terminals: 0.25" (6.35mm) Copper With Tin Plated, 0.8mm Thickness
- Option: Gold or Silver Plated Available Upon Request
- Direct Connect To Female Terminal, Terminal Version For Easy Replacement
- Shock Safe Casing
- High Vibration Resistant
- Application: TV, VCR, Monitor, Adapter, Communication Equipments, Protection and Safety For All Other Small Equipment
- Replace Conventional Cartridge Fuses
- Ampere Rating: 250mA~30A
- Standard: UL 248-14
- Low Internal Resistant
- Designed And Patented By **GLORYTECH**

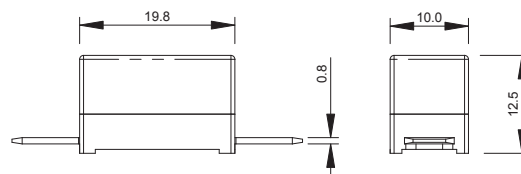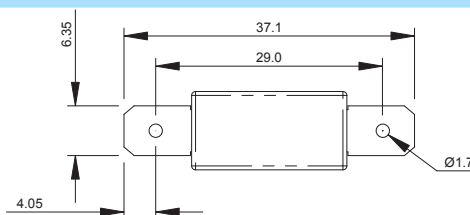

Scale: mm

Specifications

Opening Time / Pre-arcing Time:

In	1.0 In	1.35 In	2.0 In	
250mA-30A	Carry	Max. 1 Hr	Min. 3 sec	Max. 120 sec

Ordering Information:

Part Number	Ampere (A)	Voltage (V)	Voltage Drop Max. (mV)	Breaking Capacity (AC)	I ² t Min. (A ² s)	UL
13040250440	250 mA	250 V	1100	500A 250V	0.38	Pending
13040300440	300 mA	250 V	1050	500A 250V	0.73	Pending
13040315440	315 mA	250 V	1000	500A 250V	0.81	Pending
13040350440	350 mA	250 V	950	500A 250V	1.01	Pending
13040400440	400 mA	250 V	850	500A 250V	1.35	Pending
13040500440	500 mA	250 V	650	500A 250V	2.35	Pending
13040600440	600 mA	250 V	550	500A 250V	3.75	Pending
13040630440	630 mA	250 V	520	500A 250V	4.13	Pending
13040700440	700 mA	250 V	500	500A 250V	5.1	Pending
13040750440	750 mA	250 V	450	500A 250V	6.5	Pending
13040800440	800 mA	250 V	400	500A 250V	7.2	Pending
13041100440	1 A	250 V	350	500A 250V	10.5	Pending
13041125440	1.25 A	250 V	300	500A 250V	17.8	Pending
13041150440	1.5 A	250 V	280	500A 250V	30.5	Pending
13041160440	1.6 A	250 V	270	500A 250V	41	Pending
13041200440	2 A	250 V	235	500A 250V	64	Pending
13041250440	2.5 A	250 V	215	500A 250V	110	Pending
13041300440	3 A	250 V	200	500A 250V	150	Pending
13041315440	3.15 A	250 V	190	500A 250V	160	Pending
13041350440	3.5 A	250 V	180	500A 250V	190	Pending
13041400440	4 A	250 V	160	500A 250V	250	Pending
13041500440	5 A	250 V	140	500A 250V	350	Pending
13041600440	6 A	250 V	130	500A 250V	490	Pending
13041630440	6.3 A	250 V	130	500A 250V	550	Pending
13041700440	7 A	250 V	120	500A 250V	700	Pending
13041750440	7.5 A	250 V	110	500A 250V	800	Pending
13041800440	8 A	250 V	105	500A 250V	1050	Pending
13042100440	10 A	250 V	90	500A 250V	1600	Pending
13042120440	12 A	250 V	90	500A 250V	2000	Pending
13042150440	15 A	250 V	80	500A 250V	2900	Pending
13042160440	16 A	250 V	70	500A 250V	5100	Pending
13042200440	20 A	250 V	60	500A 250V	8000	Pending
13042250440	25 A	250 V	50	500A 250V	12250	Pending
13042300440	30 A	250 V	50	500A 250V	14000	Pending