




Part No. **1331** series

SMD Type



- Slow Blow (T), Surge Withstand
- Size: 15(L) x 9(W) x 12 (H) mm
- Voltage: 250V and Less
- Material: * Insulating Body: Fiberglass Reinforced Plastic, UL94V0 Flame Resistant
- * Element: Silver Alloy
- * Terminals: Copper With Tin Plated, 0.8mm Thickness
- Option: Gold or Silver Plated Available Upon Request
- P.C. Board Surface Mount
- Shock Safe Casing
- High Vibration Resistant
- Application: TV, VCR, Monitor, Adapter, Communication Equipments, Protection and Safety For All Other Small Equipment
- Replace Conventional Cartridge Fuses
- Ampere Rating: 50mA~30A
- Standard: IEC 60127-4(UMF)
- Low Internal Resistant
- Designed And Patented By **GLORYTECH**

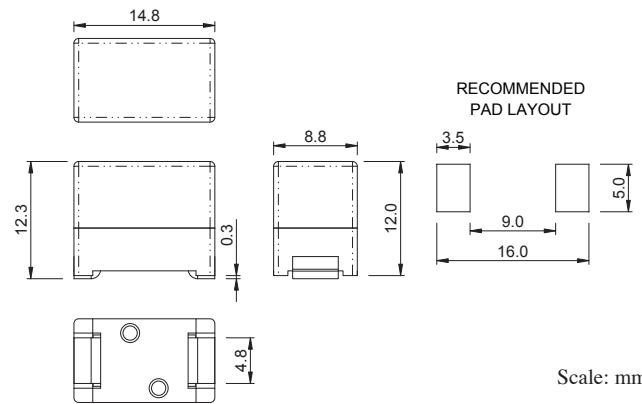

Scale: mm

Specifications

Opening Time / Pre-arcing Time:

In	1.0 In	1.25 In	2.0 In	10 In
50mA-30A	Carry	Min. 60 min.	Max. 120 s	Min. 10 ms Max. 100 ms

Ordering Information:

Part Number	Ampere (A)	Voltage (V)	Voltage Drop Max. (mV)	Breaking Capacity (AC)	Pt Min. (A ² s)	MS	VDE	D.E.	UL	US	PS
13310050440	50 mA	250 V	1500	500A 250V	0.016						Pending
13310063440	63 mA	250 V	1300	500A 250V	0.026						Pending
13310080440	80 mA	250 V	1100	500A 250V	0.042						Pending
13310100440	100 mA	250 V	1000	500A 250V	0.065						Pending
13310125440	125 mA	250 V	900	500A 250V	0.102						Pending
13310160440	160 mA	250 V	800	500A 250V	0.166						Pending
13310200440	200 mA	250 V	600	500A 250V	0.26						Pending
13310250440	250 mA	250 V	550	500A 250V	0.44						Pending
13310315440	315 mA	250 V	350	500A 250V	0.7						Pending
13310400440	400 mA	250 V	300	500A 250V	1.28						Pending
13310500440	500 mA	250 V	250	500A 250V	2						Pending
13310630440	630 mA	250 V	200	500A 250V	3.1						Pending
13310800440	800 mA	250 V	180	500A 250V	4.1						Pending
13311100440	1 A	250 V	150	500A 250V	8						Pending
13311125440	1.25 A	250 V	135	500A 250V	11.5						Pending
13311160440	1.6 A	250 V	125	500A 250V	17.2						Pending
13311200440	2 A	250 V	110	500A 250V	21						Pending
13311250440	2.5 A	250 V	100	500A 250V	32						Pending
13311315440	3.15 A	250 V	100	500A 250V	48						Pending
13311400440	4 A	250 V	100	500A 250V	95						Pending
13311500440	5 A	250 V	100	500A 250V	140						Pending
13311630440	6.3 A	250 V	100	500A 250V	240						Pending
13311700440	7 A	250 V	80	500A 250V	300						Pending
13311800440	8 A	250 V	80	500A 250V	380						Pending
13312100440	10 A	250 V	80	500A 250V	590						Pending
13312120440	12 A	250 V	80	500A 250V	850						Pending
13312150440	15 A	250 V	80	500A 250V	1300						Pending
13312160440	16 A	250 V	80	500A 250V	1500						Pending
13312200440	20 A	250 V	80	500A 250V	2400						Pending
13312250440	25 A	250 V	70	500A 250V	3000						Pending
13312300440	30 A	250 V	70	500A 250V	5000						Pending