





Part No. **1555** series

Horizontal Spade Type



- Surge Withstand - Time Delay
- Size: 20(L) x 10(W) x 12.5(H)
- Voltage: 80V and Less
- Material: * Insulating Body: Fiberglass Reinforced Plastic, UL94V0 Flame Resistant
 - * Element: Silver Alloy
 - * Terminals: Copper With Tin Plated, 0.8mm Thickness
 - Option: Gold or Silver Plated Available Upon Request
- Spade Terminal For Easy Entry
- Shock Safe Casing
- Low Internal Resistant
- High Vibration Resistant
- According to SAE J553
- Designed And Patented By **GLORYTECH**

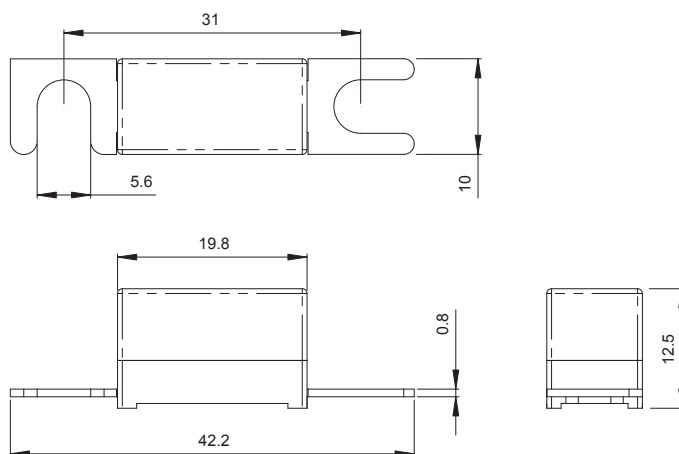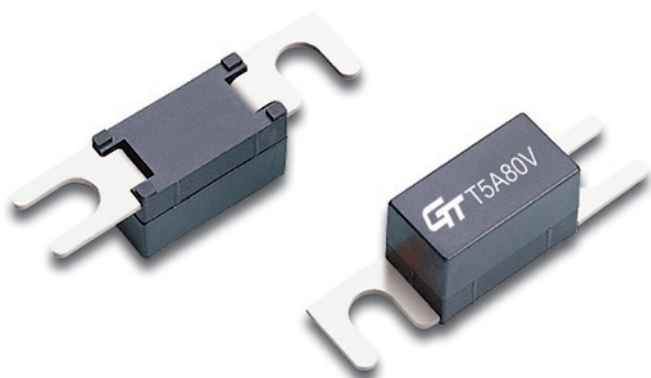

Scale: mm

Specifications

Opening Time / Pre-arcing Time:

In	1.1 In	1.35 In	2.0 In		3.5 In		6.0 In		10 In	
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
800mA-150A	> 4 Hours	< 1 Hour	5 s	60 s	2 s	7 s	0.2 s	1 s	0.03 s	0.3 s

Interruption Ratings: 1000 Amperes @80VDC

Ordering Information:

Part Number	Ampere (A)	Voltage (V)
15550800440	800 mA	80 V
15551100440	1 A	80 V
15551125440	1.25 A	80 V
15551160440	1.6 A	80 V
15551200440	2 A	80 V
15551250440	2.5 A	80 V
15551315440	3.15 A	80 V
15551400440	4 A	80 V
15551500440	5 A	80 V
15551630440	6.3 A	80 V
15551700440	7 A	80 V
15551800440	8 A	80 V
15552100440	10 A	80 V
15552120440	12 A	80 V
15552150440	15 A	80 V

Part Number	Ampere (A)	Voltage (V)
15552160440	16 A	80 V
15552200440	20 A	80 V
15552250440	25 A	80 V
15552300440	30 A	80 V
15552350440	35 A	80 V
15552400440	40 A	80 V
15552500440	50 A	80 V
15552600440	60 A	80 V
15552700440	70 A	80 V
15552800440	80 A	80 V
15553100440	100 A	80 V
15553120440	120 A	80 V
15553125440	125 A	80 V
15553130440	130 A	80 V
15553150440	150 A	80 V