

Max-Blade Type Automotive Fuse

New !! Patented







RoHS

Part No. **1575** series With Indicator (LED)



- Slow Blow, Low Voltage For Up To 32V DC
- Material: * Body: Plastic
* Metal: Zinc Alloy
- Standard: According To SAE J1888
- Circuit Protection To Replace Fusible Wire Or Fusible Link
- Fuses Are Color-Coded For Easy Amperage Identification
- The illuminative design is easy to identify if the fuse blew out
(Battery with power, Keep the switch/key in "ON" position)
- Once the over-current flow to the circuit cause the fuse blew out and the LED illuminated
- Easy for DIY replacement

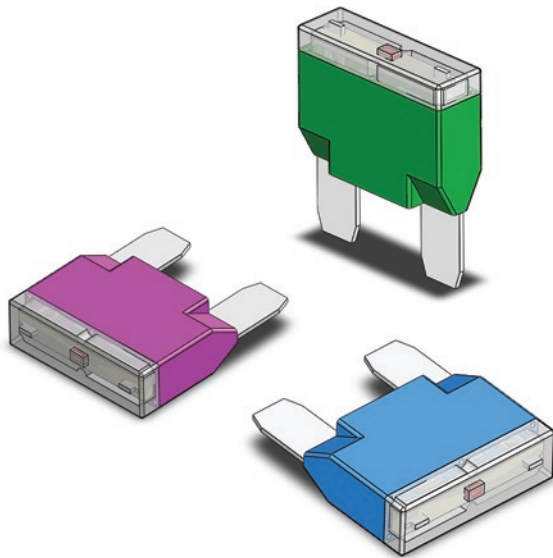

Scale: mm

Specifications

Opening Time / Pre-arcing Time:

In	1.0 In	1.35 In		2.0 In		3.5 In		6.0 In	
20-120A	>100 Hours	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
		60 s	3600 s	2 s	60 s	0.2 s	7 s	0.04 s	1 s

Interruption Ratings: 1000 Amperes @32VDC

Ordering Information:

Part Number	Ampere (A)	Voltage (VDC)	Body Color
15752200200	20 A	32 V	● Yellow
15752300200	30 A	32 V	● Green
15752350200	35 A	32 V	● Brown
15752400200	40 A	32 V	● Orange
15752500200	50 A	32 V	● Red
15752600200	60 A	32 V	● Blue
15752700200	70 A	32 V	● Tan
15752800200	80 A	32 V	⊖ Natural
15753100200	100 A	32 V	● Violet
15753120200	120 A	32 V	● Purple