


# Mounted Fuse Block




Part No. **1829 | 908400**

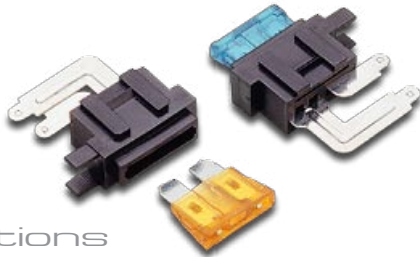

## Specifications

### Electrical:

Suitable Rated Current	30A Max.
Dielectric Strength For 60 Seconds	AC 1500 V Min.
Insertion & Extraction Force	1 Kg. Min.
Contact Resistance At 1A DC	5mΩ Max.
Insulation Resistance At 500V DC	100MΩ Min.
Voltage Drop	20mV Max.
Temperature Rise	50°C Max.
Molded Parts	Nylon With Glass Fiber
Terminals	Brass
Style	P.C.Board Snap-In Type



Scale: mm





Part No. **1829 | 909400**



## Specifications


### Electrical:

Suitable Rated Current	30A Max.
Dielectric Strength For 60 Seconds	AC 1500 V Min.
Insertion & Extraction Force	1 Kg. Min.
Contact Resistance At 1A DC	5mΩ Max.
Insulation Resistance At 500V DC	100MΩ Min.
Voltage Drop	20mV Max.
Temperature Rise	50°C Max.
Molded Parts	Nylon With Glass Fiber
Terminals	Brass
Style	Double Fuse P.C.Board Snap-In Type



Scale: mm





Part No. **1829 | 910400**

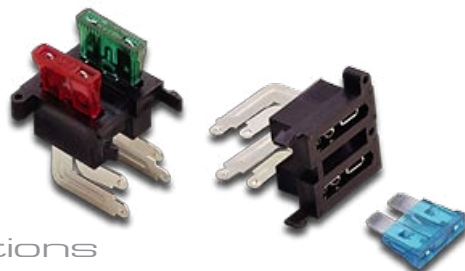

## Specifications

### Electrical:

Suitable Rated Current	30A Max.
Dielectric Strength For 60 Seconds	AC 1500 V Min.
Insertion & Extraction Force	1 Kg. Min.
Contact Resistance At 1A DC	5mΩ Max.
Insulation Resistance At 500V DC	100MΩ Min.
Voltage Drop	20mV Max.
Temperature Rise	50°C Max.
Molded Parts	Nylon With Glass Fiber
Terminals	Brass
Style	Double Fuse P.C.Board Snap-In Type



Scale: mm