



Mounting Holes



Terminal Dim.







Material:

- Cover :PC.(Transparent)
- Housing & Base : PBT (Black)
- Push Button : POM.(White)
- Terminal : Copper with Tin plated

Notes:

Rating 100A max. tested by 4pcs 25A load

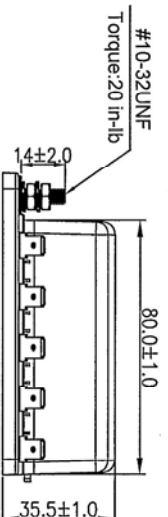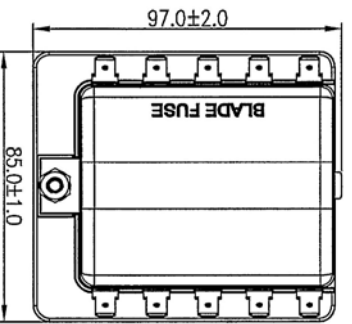

SPECIFICATIONS :

- Fuse Specifications : For Blade Fuse
- Voltage : 32VDC Max.
- Input Terminal Rating : #10-32 threaded studs (100A max.)
- Output Terminal Rating : 30A max. per circuit.
- Connection Pad Option Available :
 - Input wire size : #4-6 AWG
 - Output wire size : #12-16 AWG
- Temperature Rating : -20°C ~ +85°C
- Torque Rating : 2.25 Nm(20 IN-LBS) Max.
- Mounting Torque Rating : 0.9 Nm(8 IN-LBS) Max.

Tolerances : Unless Otherwise Specified			
Dimension	Critical To Function	General	
< 1	+/-0.02	+/-0.03	
1 ~ 8	+/-0.1	+/-0.2	
8 ~ 24.995	+/-0.15	+/-0.25	
25 ~ 99.99	+/-0.2	+/-0.3	
Angles	+/-1°	+/-5°	
Rev	EN	Description	Dwg Ckd Appd Date
B	93092401	Modify the tolerance	Kao Chyi Ku 2004/9/24

Material	Drawn	<h2 style="text-align: center;">GLORYTECH TECHNOLOGY CO., LTD.</h2>			
	Check				
Finish	Engr	Title: Blade Fuse Box			
	Appd				
Unless Otherwise Specified Dimensions are mm (inch)		A4	GTQD-BLK-1916-1310661	B	
Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)					
Model File Name : Blade Fuse Box(10 Position)		Dwg Size	Sht	of	
Drawing File Name : GTQD-BLK-1916-1310661			1	1	
Part Number : 1916 1310 661		Date:	2020/10/27		
		Rev			