



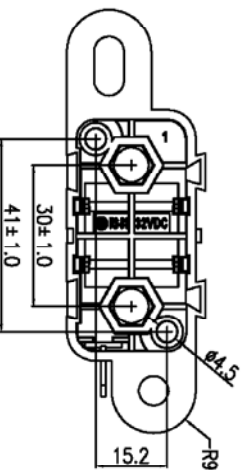


MOUNTING HOLES



Fuse Size

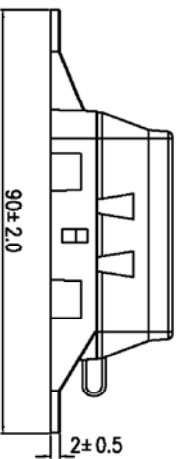

SPECIFICATIONS :

Current Rating : 30 ~ 100A Max.

Voltage : 32 VDC

Wire : #2 - 8 AWG

Temperature Rating : -40°C ~ 125°C

Termination : M5 threaded studs and hex nuts for fuse mounting

Torque Rating : 20 in-lb(2.25Nm) max.

Mount Torque Rating : 40 in-lb(5Nm) max.

M6 screws with washers (recommended)

Material

Cover : Nylon-66(Black)

Housing : PBT(Black)

Screw : Ni-Plated Steel Studs

Notes : Fuse not included

Tolerances : Unless Otherwise Specified	
Dimension	Critical To Function
< 1	+/- 0.02
1 ~ 8	+/- 0.1
8 ~ 24.995	+/- 0.15
25 ~ 99.99	+/- 0.2
Angles	+/- 1°
Rev	EN
93092401	Modify the tolerance
	Dwg Kao
	Ckd Chyi
	Appd Ku
	Date 2004/9/24

Material	Drawn	GLORYTECH TECHNOLOGY CO., LTD. Title: Bolt-In Fuse Block		
	Check			
Finish	Engr	Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)	A4	GTQD-BLK-1917-0108
	Appd			
Model File Name : Bolt-In Fuse Block for Fuse Strip		Scale:	Dwg Size	Sht 1 of 1
Drawing File Name : GTQD-BLK-1917-0108		Date: 2018/1/16		
Part Number : 1917 0108 000		Rev		