


SPECIFICATIONS :

Current Rating : 30Amps @500VAC
 Contact : 0.4mm thick Brass, Tin Plated
 Insulator : PBT, UL Rated 94 V-0
 Temperature Rating : -50 °C ~ +145 °C

Mounting Detail

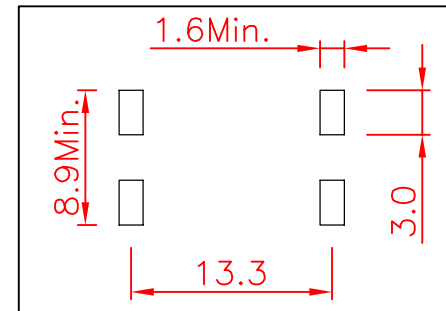

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/- 0.02	+/- 0.03
1 ~ 8	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- 5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material		GLORYTECH TECHNOLOGY CO., LTD.			
Drawn	Check	Title:		A4	B
Finish	Engr	Surface Mount Fuse Block		GTQD-BLK-1936-1102	Rev
	Appd				
Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)		Scale:	2:1	Dwg Size	Sht 1 of 1
Model File Name : Surface Mount Fuse Block for Standard / Mini / Low Profile Blade Fuse					
Drawing File Name : GTQD-BLK-1936-1102					
Part Number : 1936 1102 400				Date:	2012/2/10