


SPECIFICATIONS :
 Current Rating : 40Amps @500VAC
 Contact : 0.5mm thick Beryllium, Tin Plated
 Insulator : PBT, UL Rated 94 V-0
 Temperature Rating : -50 °C ~ +145 °C

Mounting Detail

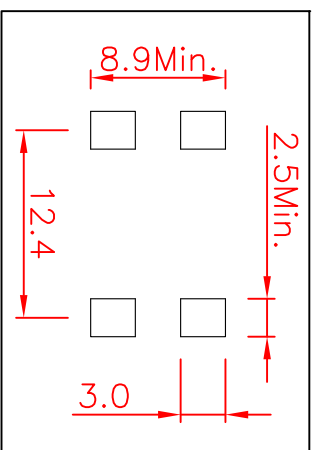

Tolerances : Unless Otherwise Specified			
Dimension	Critical To Function	General	
< 1	+/-0.02	+/-0.03	
1 ~ 8	+/-0.1	+/-0.2	
8 ~ 24.995	+/-0.15	+/-0.25	
25 ~ 99.99	+/-0.2	+/-0.3	
Angles	+/-1°	+/-5°	
Rev	EN	Description	Dwg Ckd Appd Date
B	93092401	Modify the tolerance	Kao Chyi Ku 2004/9/24

Material	Drawn	GLORYTECH TECHNOLOGY CO., LTD. Title: Surface Mount Fuse Block				
	Check					
Finish	Engr	Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)	A4	GTQD-BLK-1936-1103		
	Appd					
Model File Name : Surface Mount Fuse Block for Standard / Mini / Low Profile Blade Fuse		Scale:	Dwg Size	Sht	of	Rev
Drawing File Name : GTQD-BLK-1936-1103		2:1		1	1	
Part Number : 1936 1103 400		Date:	2013/12/11			