


**SPECIFICATIONS :**  
 Current Rating : 30Amps @500VAC  
 Contact : 0.4mm thick Phosphor Bronze, Tin Plated  
 Insulator : Nylon with Glass Fiber, UL Rated 94 V-0  
 Temperature Rating : -50 °C ~ +145 °C

Part No.	Terminal
1939 1103 400	Bright Tin Plated
1939 1103 700	Matte Tin Plated

**Mounting Detail**

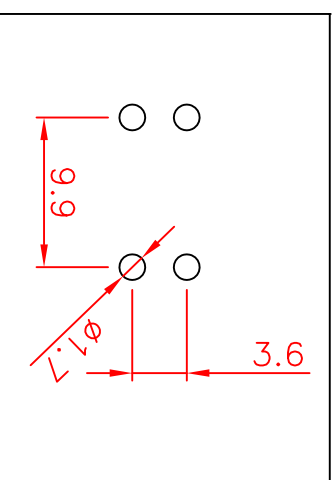

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/-0.02	+/-0.03
1 ~ 8	+/-0.1	+/-0.2
8 ~ 24.995	+/-0.15	+/-0.25
25 ~ 99.99	+/-0.2	+/-0.3
Angles	+/- 1°	+/- 5°

Rev	EN	Description	Dwgg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material	Drawn	Title:	A4	GTQD-BLK-1939-1103	B		
	Check						
Finish	Engr	P.C.B. Fuse Block	Dwg Size	Sht	1 of 1		
	Appd						
Unless Otherwise Specified Dimensions are mm (inch)		Scale:	2:1	Dwg Size	Sht	1 of 1	Rev

Model File Name : P.C.B. Fuse Block for Mini Blade Fuse  
 Drawing File Name : GTQD-BLK-1939-1103  
 Part Number : 1939 1103 x00  
 Date: 2016/7/19