


**SPECIFICATIONS :**  
 Current Rating : 30Amps @500VAC  
 Contact : 0.4mm thick Phosphor Bronze, Tin Plated  
 Insulator : Nylon with Glass Fiber, UL Rated 94 V-0  
 Temperature Rating : -50 °C ~ +145 °C

Part No.	Terminal
1939 1104 400	Bright Tin Plated
1939 1104 700	Matte Tin Plated

**Mounting Detail**

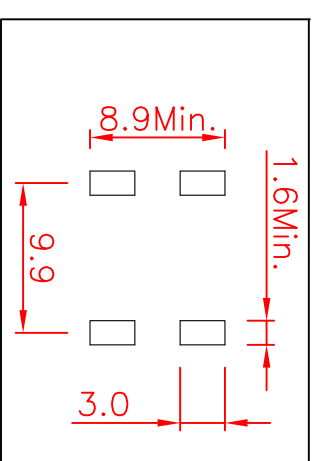

Tolerances : Unless Otherwise Specified			
Dimension	Critical To Function	General	
< 1	+/-0.02	+/-0.03	
1 ~ 8	+/-0.1	+/-0.2	
8 ~ 24.995	+/-0.15	+/-0.25	
25 ~ 99.99	+/-0.2	+/-0.3	
Angles	+/-1°	+/-5°	

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material	Drawn	Title:	Dwg Size	Sht	1 of	1	Rev
	Check						
Finish	Engr	<b>GLORYTECH TECHNOLOGY CO., LTD.</b>	A4	GTQD-BLK-1939-1104	B		
	Appd						
Unless Otherwise Specified Dimensions are mm (inch)		<b>S.M.D. Fuse Block</b>					
Tolerances:							
.x = 1.0 (.04)		Scale:	2:1				
.xx = 0.5 (.02)							
.xxx = 0.25 (.010)							
Model File Name : Surface Mount Fuse Block for Mini Blade Fuse							
Drawing File Name : GTQD-BLK-1939-1104							
Part Number : 1939 1104 x00		Date:					
							2016/7/19