


SPECIFICATIONS:

- Normal Blow Glass Tube Fuses
- 10.3 x 38.1mm (13/32 x 1-1/2 Inch)
- Caps : Brass With Gold plating
- Body : Glass Tube
- Element : Zinc Alloy
- Ampere Rating : 10 - 80 A
- Voltage Rating : 32V
- Standard : UL/CSA 248-14
- Notes: Unless Otherwise Specified

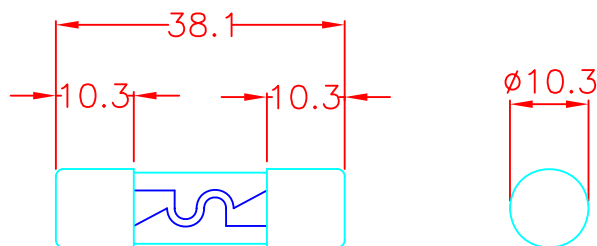

Order Information :

Part No.	Ampere(A)	Voltage(V)
1101 2100 200	10A	32V
1101 2120 200	12A	32V
1101 2150 200	15A	32V
1101 2200 200	20A	32V
1101 2250 200	25A	32V
1101 2300 200	30A	32V
1101 2350 200	35A	32V
1101 2400 200	40A	32V
1101 2450 200	45A	32V
1101 2500 200	50A	32V
1101 2600 200	60A	32V
1101 2700 200	70A	32V
1101 2800 200	80A	32V

Electrical Characteristics:

% of Ampere Rating	Ampere Rating	Opening Time
100%	10 ~ 80 A	Carry
135%	10 ~ 80 A	1 Hour Max.
200%	10 ~ 30 A	10 Sec. Max.
300%	35 ~ 80 A	4 Sec. Max.

Tolerances : Unless Otherwise Specified

Dimension	Critical To Function	General
< 1	+/-0.02	+/-0.03
1 ~ 8	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- 5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material	Drawn		GLORYTECH TECHNOLOGY CO., LTD.			
	Check					
Finish	Engr		Title: Normal Blow Glass Fuse (5AG)	A	GTQD-FUS-1101	B
	Appd					
Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)			Scale:	1:1	Dwg Size	Sht 1 of 1
Model File Name : Normal Blow Glass Fuse (5AG)						
Drawing File Name : GTQD-FUS-1101						
Part Number : 1101 XXXX 200				Date:	2004/9/24	