


SPECIFICATIONS:

- Normal Blow Glass Tube Fuses with Indicator
- 10.3 x 38.1mm (13/32 x 1-1/2 Inch)
- Caps: Brass with Gold plating
- Body: Glass Tube
- Element: Zinc Alloy
- Ampere Rating: 10 - 80 A
- Voltage Rating: 32V
- Standard : UL & CSA 248-14

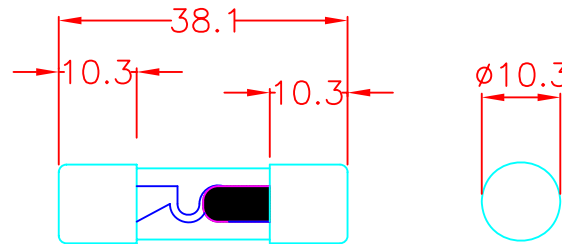

Order Information:

Part No.	Ampere(A)	Voltage(V)
1111 2100 200	10A	32V
1111 2120 200	12A	32V
1111 2150 200	15A	32V
1111 2200 200	20A	32V
1111 2250 200	25A	32V
1111 2300 200	30A	32V
1111 2350 200	35A	32V
1111 2400 200	40A	32V
1111 2450 200	45A	32V
1111 2500 200	50A	32V
1111 2600 200	60A	32V
1111 2700 200	70A	32V
1111 2800 200	80A	32V

Notes: Unless Otherwise Specified

Electrical Characteristics:

% of Ampere Rating	Ampere Rating	Opening Time
100%	10 ~ 80 Amp	Carry
135%	10 ~ 80 Amp	1 Hour Max.
200%	10 ~ 30 Amp	10 Sec. Max.
300%	35 ~ 80 Amp	4 Sec. Max.

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/- 0.02	+/- 0.03
1 ~ 8	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- 5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material	Drawn	GLORYTECH TECHNOLOGY CO., LTD.			
	Check				
Finish	Engr	Title: Normal Blow Glass Fuse with Indicator (5AG)	A	GTQD-FUS-1111	B
	Appd				
Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)		Scale: 1:1	Dwg Size	Sht 1 of 1	Rev
Model File Name : Normal Blow Glass Fuse with Indicator (5AG)					
Drawing File Name : GTQD-FUS-1111					
Part Number : 1111 xxxx 200			Date:	2004/9/24	