


SPECIFICATIONS:

- Slow Blow Glass Tube Fuses(MSG63)
- 6.3 φ x 32 mm(1 / 4 x 1-1 / 4 Inch)
- Caps: Brass With Nickel Plating
- Body: Glass Tube
- Element: Silver Alloy
- Ampere Rating: 100mA ~ 30A
- Operating Temperature : -40 ~ +85 °C
- Voltage Rating: 250V and Less
- Standards: UL/CSA 248-14
- Approvals : UL-E115701, CSA-LR89136-1

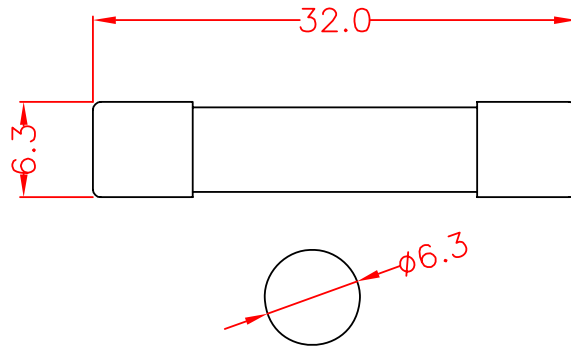

Order Information:

Part No .	A m p e r e (A)	V o l t a g e (V)
1 1 1 8 0 1 0 0 4 0 0	1 0 0 m A	2 5 0 v
1 1 1 8 0 1 2 5 4 0 0	1 2 5 m A	2 5 0 v
1 1 1 8 0 1 6 0 4 0 0	1 6 0 m A	2 5 0 v
1 1 1 8 0 2 0 0 4 0 0	2 0 0 m A	2 5 0 v
1 1 1 8 0 2 5 0 4 0 0	2 5 0 m A	2 5 0 v
1 1 1 8 0 3 0 0 4 0 0	3 0 0 m A	2 5 0 v
1 1 1 8 0 3 1 5 4 0 0	3 1 5 m A	2 5 0 v
1 1 1 8 0 4 0 0 4 0 0	4 0 0 m A	2 5 0 v
1 1 1 8 0 5 0 0 4 0 0	5 0 0 m A	2 5 0 v
1 1 1 8 0 6 0 0 4 0 0	6 0 0 m A	2 5 0 v
1 1 1 8 0 6 3 0 4 0 0	6 3 0 m A	2 5 0 v
1 1 1 8 0 7 0 0 4 0 0	7 0 0 m A	2 5 0 v
1 1 1 8 0 8 0 0 4 0 0	8 0 0 m A	2 5 0 v
1 1 1 8 1 1 0 0 4 0 0	1 A	2 5 0 v
1 1 1 8 1 1 2 5 4 0 0	1 . 2 5 A	2 5 0 v
1 1 1 8 1 1 5 0 4 0 0	1 . 5 A	2 5 0 v
1 1 1 8 1 1 6 0 4 0 0	1 . 6 A	2 5 0 v
1 1 1 8 1 2 0 0 4 0 0	2 A	2 5 0 v
1 1 1 8 1 2 5 0 4 0 0	2 . 5 A	2 5 0 v
1 1 1 8 1 3 0 0 4 0 0	3 A	2 5 0 v
1 1 1 8 1 3 1 5 4 0 0	3 . 1 5 A	2 5 0 v
1 1 1 8 1 3 5 0 4 0 0	3 . 5 A	2 5 0 v
1 1 1 8 1 4 0 0 4 0 0	4 A	2 5 0 v
1 1 1 8 1 5 0 0 4 0 0	5 A	2 5 0 v
1 1 1 8 1 6 0 0 4 0 0	6 A	2 5 0 v
1 1 1 8 1 6 3 0 4 0 0	6 . 3 A	2 5 0 v
1 1 1 8 1 7 0 0 4 0 0	7 A	2 5 0 v
1 1 1 8 1 8 0 0 4 0 0	8 A	2 5 0 v
1 1 1 8 2 1 0 0 4 0 0	1 0 A	2 5 0 v
1 1 1 8 2 1 2 0 4 0 0	1 2 A	2 5 0 v
1 1 1 8 2 1 5 0 4 0 0	1 5 A	2 5 0 v
1 1 1 8 2 1 6 0 4 0 0	1 6 A	2 5 0 v
1 1 1 8 2 2 0 0 4 0 0	2 0 A	2 5 0 v
1 1 1 8 2 2 5 0 4 0 0	2 5 A	2 5 0 v
1 1 1 8 2 3 0 0 4 0 0	3 0 A	2 5 0 v

Electrical Characteristics:

% Of Ampere Rating	Ampere Rating	Opening Time
100%	100mA to 30A	Carry
135%	100mA to 30A	1 Hour Max
200%	100mA to 30A	5 ~ 120 Sec

Tolerances : Unless Otherwise Specified						
Dimension	Critical To Function	General				
< 1	+/-0.02	+/-0.03				
1 ~ 8	+/- 0.1	+/- 0.2				
8 ~ 24.995	+/- 0.15	+/- 0.25				
25 ~ 99.99	+/- 0.2	+/- 0.3				
Angles	+/- 1°	+/- 5°				
Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material		Drawn	GLORYTECH TECHNOLOGY CO., LTD.			
Finish		Check	Title:6.3 φ x 32 mm Slow Blow Glass Tube Fuses		A4	B
Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)		Engr	Scale: 2:1		Dwg Size	Sht 1 of 1
		Appd				
Model File Name : 6.3 φ x 32 mm Slow Blow Glass Tube Fuses						
Drawing File Name : GTQD-FUS-1118						
Part Number : 1118 XXXX 400					Date:	2004/9/24