




Rating In OCR FONT

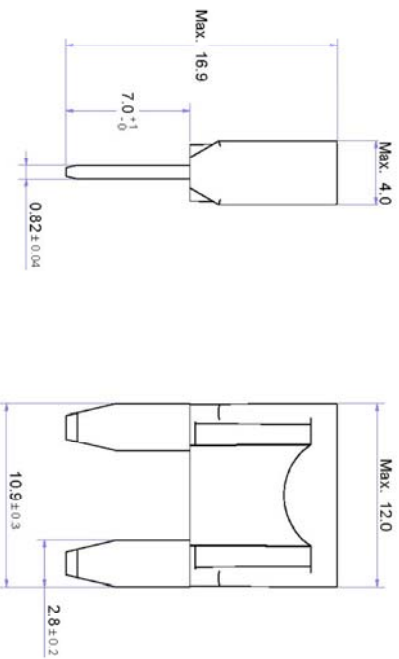

According to ISO 8820-3 standard specification  
Electrical Characteristics

% of Rated Current	Operating Time	
	min.	max.
110%	100h	---
135%	0.75s	1800s
200%	0.15s	5s
350%	0.04s	0.5s
600%	0.02s	0.2s

Part No.	Rated Current	Voltage Drop	Body color
1413 1200	2A	225mV	Grey
1413 1300	3A	200mV	Violet
1413 1400	4A	200mV	Pink
1413 1500	5A	175mV	Tan
1413 1750	7.5A	150 mV	Brown
1413 2100	10A	140 mV	Red
1413 2150	15A	125mV	Blue
1413 2200	20A	125mV	Yellow
1413 2250	25A	125mV	Natural(White)
1413 2300	30A	120mV	Green

### Specifications :

- 1.Housing Material :Nylon PA66
- 2.Terminal : Zinc alloy, tin plated
- 3.UL 248 Special Purpose Fuse



Tolerances : Unless Otherwise Specified	
Dimension	Critical To Function General
< 1	+/- 0.02 +/- 0.03
1 ~ 8	+/- 0.1 +/- 0.2
8 ~ 24.995	+/- 0.15 +/- 0.25
25 ~ 99.99	+/- 0.2 +/- 0.3
Angles	+/- 1° +/- 5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material	Drawn	Title:	A4	GTQD-FUS-1413	B
	Check				
Finish	Engr	Mini Blade Type Automotive Fuse	A4	GTQD-FUS-1413	B
	Appd				
Unless Otherwise Specified Dimensions are mm (inch)		Scale:	Dwg Size	Sht	1 of 1
Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)					Rev
Model File Name : Mini Blade Type Automotive Fuse ; 32V					
Drawing File Name : GTQD-FUS-1413					
Part Number : 1413 xxxx		Date:			2019/7/3

**GLORYTECH TECHNOLOGY CO., LTD.**