




**Specifications :**  
 Body & Cover Material : Thermoplastics  
 Cover Color : Red  
 Terminal Material : Copper Alloy, Tin Plated  
 Interruption Ratings : 100A @ 350VAC  
 1000A @ 80VDC  
 50A @ 125VDC



Rating In OCR FONT

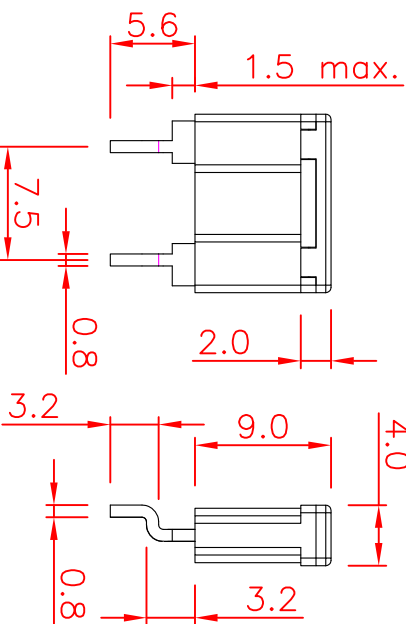

**Recommended Pad Layout:**



**Electrical Characteristics:**

% of Rated Current	Opening Time	
	Min.	Max.
100%	4hr	---
200%	0.15s	5s

**Order Information:**

Part No.	Amperre(A)	Body color
1437 0500	0.5	Dark Blue
1437 1100	1	Black
1437 1200	2	Grey
1437 1300	3	Violet
1437 1400	4	Pink
1437 1500	5	Tan
1437 1600	6	Light Red
1437 1700	7	Light Orange
1437 1750	7.5	Brown
1437 1800	8	Light Yellow
1437 2100	10	Red

**GLORYTECH TECHNOLOGY CO., LTD.**

Material	Drawn
	Check
Finish	Engr
	Appd

**Title:**  
 Surface Mount Type  
 Mini Blade Fuse

**A4** **GTQD-FUS-1437** **B**

Unless Otherwise Specified  
 Dimensions are mm (inch)  
 Tolerances:  
 .x = 1.0 (.04)  
 .xx = 0.5 (.02)  
 .xxx = 0.25 (.010)

Scale:	Dwg Size	Sht	1 of	1	Rev
2:1					

Model File Name : Surface Mount Type Mini Blade Fuse

Drawing File Name : GTQD-FUS-1437

Part Number : 1437 xxxx

Date: 202011/17

Tolerances : Unless Otherwise Specified						
Dimension	Critical To Function	General				
< 1	+/- 0.02	+/- 0.03				
1 ~ 8	+/- 0.1	+/- 0.2				
8 ~ 24.995	+/- 0.15	+/- 0.25				
25 ~ 99.99	+/- 0.2	+/- 0.3				
Angles	+/- 1°	+/- 5°				
Rev	EN	Description	Dwng	CKd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24