



Rating In OCR FONT

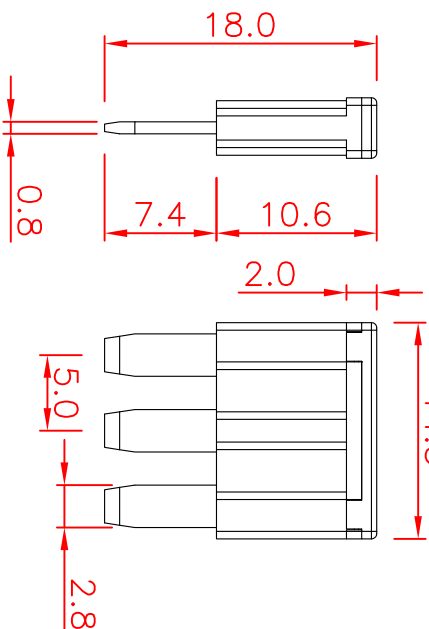

Specifications :


Body Material : Nylon with 25% Fiber Glass
 Cover Material : Nylon with 25% Fiber Glass, Blue
 Metal Material : Copper Alloy, gal. Sn
 Element : Zinc Alloy, Sn Plated
 Interruption Ratings : 1000A 58VDC

Order Information:

Part No.	Amperre(A)	Voltage(VDC)	Body color
1451 1500 200	5	58	Tan
1451 1750 200	7.5		Brown
1451 2100 200	10		Red
1451 2150 200	15		Blue
1451 2200 200	20		Yellow

Opening Time / Pre-arcing Time:

In	1.1 In		1.35In		2.0 In		3.5 In		6.0 In	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
5 ~ 20A	> 100 hr	0.75s	1800s	0.15s	30s	0.04s	0.5s	0.01s	0.1s	



Tolerances : Unless Otherwise Specified						
Dimension	Critical To Function	General				
< 1	+/- 0.02	+/- 0.03				
1 ~ 8	+/- 0.1	+/- 0.2				
8 ~ 24.995	+/- 0.15	+/- 0.25				
25 ~ 99.99	+/- 0.2	+/- 0.3				
Angles	+/- 1°	+/- 5°				
Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material	Drawn	Title:	A4	GTQD-FUS-1451-58V	B
	Check				
Finish	Engr	58V Tiny3(Micro3) Fuse			
	Appd				
Unless Otherwise Specified Dimensions are mm (inch)		Scale:	Dwg Size	Sht	1 of 1
Tolerances:					
.x = 1.0 (.04)					
.xx = 0.5 (.02)					
.xxx = 0.25 (.010)					
Model File Name : 58V Tiny3(Micro3) Fuse					
Drawing File Name : GTQD-FUS-1451-58V					
Part Number : 1451 xxxx 200			Date:	2018/6/15	