


### Specifications :

Body : PET  
 Cover : PET, Red  
 Terminal : Copper Alloy, Tin Plated  
 Standard : UL248 Special Purpose Fuse  
 Approval File No. E498356-JFHR2/8  
 Interruption Ratings : DC80V 1000A  
 Filled with sand

### Order Information:

Part Number	Ampere Rating	Body Color
1541 2200 280	20A	Yellow
1541 2250 280	25A	Gray
1541 2300 280	30A	Green
1541 2350 280	35A	Brown
1541 2400 280	40A	Orange
1541 2500 280	50A	Red
1541 2600 280	60A	Blue

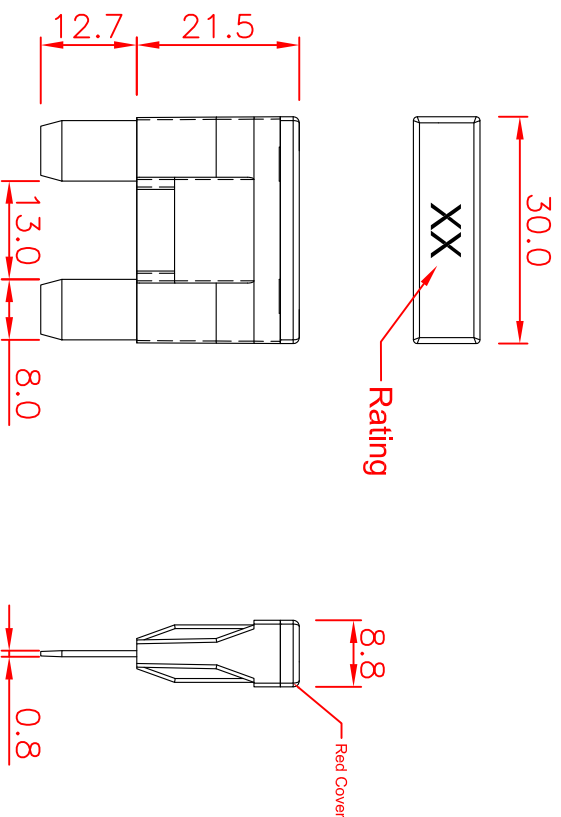


### Opening Time / Pre-arcing Time:

In	100%	135%	200%	350%	600%
20 ~ 60A	> 100h	Min. 30s Max. 3600s	Min. 1s Max. 60s	Min. 0.2s Max. 7s	Max. 1s

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/- 0.02	+/- 0.03
1 ~ 7.999	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- 5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24
C	108011801	UL認證通過改版	Kao	Chyi	Ku	2019/1/18

Material	Drawn	Title:	Dwg	Sht	1	of	1	Rev
	Check							
Finish	Engr	<b>GLORYTECH TECHNOLOGY CO., LTD.</b> 80V Max Blade Type Automotive Fuse 	A4	GTQD-FUS-1541-80V	C			
	Appd							

Unless Otherwise Specified  
 Dimensions are mm (inch)  
 Tolerances:  
 .x = 1.0 (.04)  
 .xx = 0.5 (.02)  
 .xxx = 0.25 (.010)

Model File Name : 80V Max Blade Type Automotive Fuse  
 Drawing File Name : GTQD-FUS-1541-80V  
 Part Number : 1541 xxxx 280

Date: 2019/1/18