
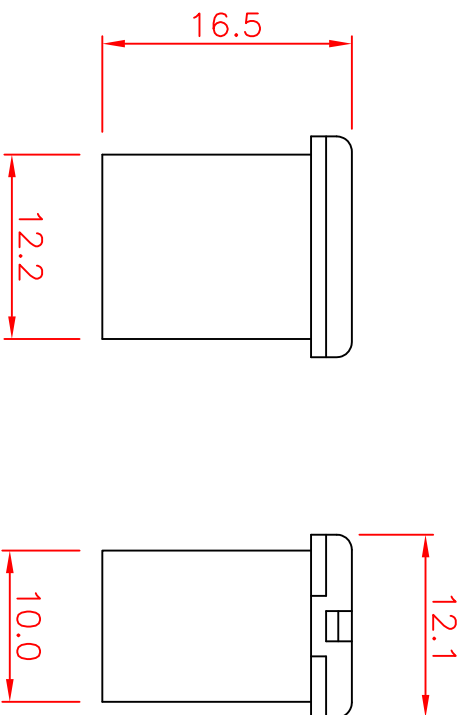


Electrical Characteristics:

| % of Ampere Rating | Ampere Rating | Opening Time |
|--------------------|---------------|--------------|
| 100% | 20 ~ 60 Amp | > 360000s |
| 135% | | 60 ~ 1800s |
| 200% | | 4 ~ 60s |
| 350% | | 0.2s ~ 7s |
| 600% | | 0.04 ~ 1s |

XX : Rating



| Part Number | Ampere(A) | Voltage(VDC) | Body Color |
|---------------|-----------|--------------|------------|
| 1569 2200 400 | 20A | 58V | Light-Blue |
| 1569 2250 400 | 25A | | White |
| 1569 2300 400 | 30A | | Pink |
| 1569 2400 400 | 40A | | Green |
| 1569 2500 400 | 50A | | Red |
| 1569 2600 400 | 60A | | Yellow |

Material :

Cover : PC
 Body :Nylon 66
 Terminals: Copper

| Tolerances : Unless Otherwise Specified | | | |
|---|----------------------|----------------------|-----------------------|
| Dimension | Critical To Function | General | |
| < 1 | +/-0.02 | +/-0.03 | |
| 1 ~ 8 | +/- 0.1 | +/- 0.2 | |
| 8 ~ 24.995 | +/- 0.15 | +/- 0.25 | |
| 25 ~ 99.99 | +/- 0.2 | +/- 0.3 | |
| Angles | +/- 1° | +/- 5° | |
| Rev | EN | Description | Dwg Ckd Appd Date |
| B | 93092401 | Modify the tolerance | Kao Chyi Ku 2004/9/24 |

| Material | Drawn Check | GLORYTECH TECHNOLOGY CO., LTD. | | |
|--|-------------|--|-----------|---------------|
| Finish | Engr Appd | Title: JCASE Low Profile Female Type Fuse Link | A4 | GTQD-FUS-1569 |
| Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) xx = 0.5 (.02) xxx = 0.25 (.010) | | Scale: 2:1 | Dwg Size | Sht 1 of 1 |
| Model File Name : JCASE Low Profile Female Type Fuse Link | | Date: | 2014/4/24 | |
| Drawing File Name : GTQD-FUS-1569 | | | | |
| Part Number : 1569 xxxx 400 | | | | |