
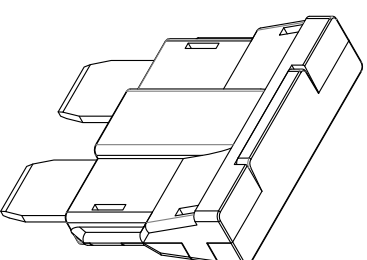

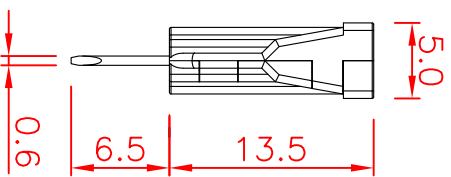


Rating In OCR FONT

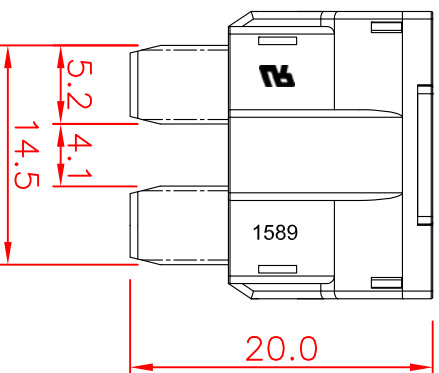

Order Information:

Part No.	Ampere(A)	Body color
1589 0500 2250	0.5	Dark Blue
1589 1100 2250	1	Black
1589 1200 2250	2	Grey
1589 1300 2250	3	Violet
1589 1400 2250	4	Pink
1589 1500 2250	5	Tan
1589 1600 2250	6	Light Red
1589 1700 2250	7	Light Orange
1589 1750 2250	7.5	Brown
1589 1800 2250	8	Light Yellow
1589 2100 2250	10	Red
1589 2120 2250	12	Light Pink
1589 2150 2250	15	Blue
1589 2160 2250	16	Light Green
1589 2200 2250	20	Yellow
1589 2250 2250	25	Natural
1589 2300 2250	30	Green
1589 2350 2250	35	Blue Green
1589 2400 2250	40	Orange

Electrical Characteristics:

% of Rated Current	Opening Time	
	0.5 ~ 30A	35 ~ 40A
100%	---	carry
110%	carry	---
135%	0.75 ~ 3600s	
200%	0.15 ~ 60s	
350%	0.04 ~ 1s	
600%	0.01 ~ 0.1s	

Specifications :

Body Material : PET
 Terminal Material : Copper Alloy, Tin Plated
 Standard : UL248 Special Purpose Fuse
 Approval File No. E498356-JFHR2/8
 Interruption Ratings : AC 250V 400A
 DC 80V 1000A

Tolerances :	Unless Otherwise Specified
Dimension	Critical To Function
< 1	+/- 0.02
1 ~ 8	+/- 0.1
8 ~ 24.995	+/- 0.15
25 ~ 99.99	+/- 0.2
Angles	+/- 1°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24
C	107092601	UL認證通過改版	Kao	Chyi	Ku	2018/9/26

GLORYTECH TECHNOLOGY CO., LTD.

Title:
Blade Type Fuse
GTQD-FUS

A4 GTQD-FUS-1589-250V C

Unless Otherwise Specified
 Dimensions are mm (inch)
 Tolerances:
 .x = 1.0 (.04)
 .xx = 0.5 (.02)
 .xxx = 0.25 (.010)

Scale:

Dwg Size Sht 1 of 1 Rev

Model File Name : Blade Type Fuse ; 250VAC ; UL Recognized

Drawing File Name : GTQD-FUS-1589-250V

Part Number : 1589 xxxx 2250

Date: 2018/9/27