


Rating In OCR FONT

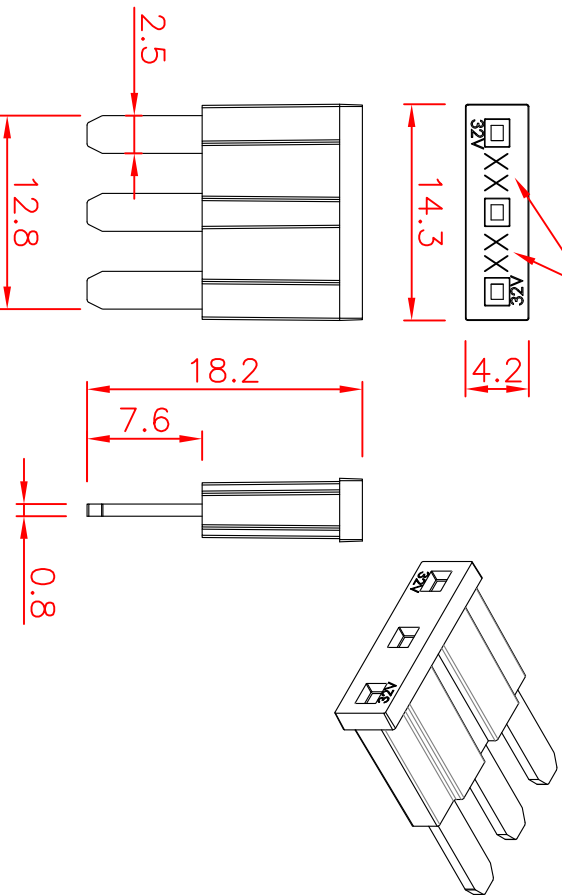

Time-Current Characteristics :

% of Ampere Rating	Opening Time
110%	100 hours Min
135%	0.75 sec. Min ; 120 sec. Max
160%	0.3 sec. Min ; 50 sec. Max
200%	0.15 sec. Min ; 5 sec. Max
350%	0.04 sec. Min ; 0.5 sec. Max
600%	0.02 sec. Min ; 0.1 sec. Max

Specification:

Voltage Rating : 32 VDC
 Interrupting Ratings: 1000A @ 32 VDC
 Metal Material : Zinc Alloy
 Housing Material : PA66
 Design Complies With : SAE 2741, ISO8820-3
 Ambient Temp. :-40°C ~ +125°C
 Rating Marking : Hot Stamping

Order Information :

Part No.	Ampere(A)	Housing Color
1594 1500 202	5	Tan
1594 1750 202	7.5	Brown
1594 2100 202	10	Red
1594 2150 202	15	Blue
1594 2200 202	20	Yellow

Tolerances : Unless Otherwise Specified			
Dimension	Critical To Function	General	
< 1	+/-0.02	+/-0.03	
1 ~ 8	+/-0.1	+/-0.2	
8 ~ 24.995	+/-0.15	+/-0.25	
25 ~ 99.99	+/-0.2	+/-0.3	
Angles	+/-1°	+/-5°	
Rev	EN	Description	Dwg Ckd Appd Date
B	93092401	Modify the tolerance	Kao Chyi Ku 2004/9/24

Material	Drawn	Title:	Dwg Size	Sht	of	Rev
	Check					
Finish	Engr	Tiny 3(Micro3) Blade Fuse	A4	1	1	B
	Appd					
Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)						
Model File Name : Tiny 3(Micro3) Blade Fuse Drawing File Name : GTQD-FUS-1594 Part Number : 1594 xxxx 202						
			Date:	2017/3/14		

GLORYTECH TECHNOLOGY CO., LTD.