


Rating In OCR FONT

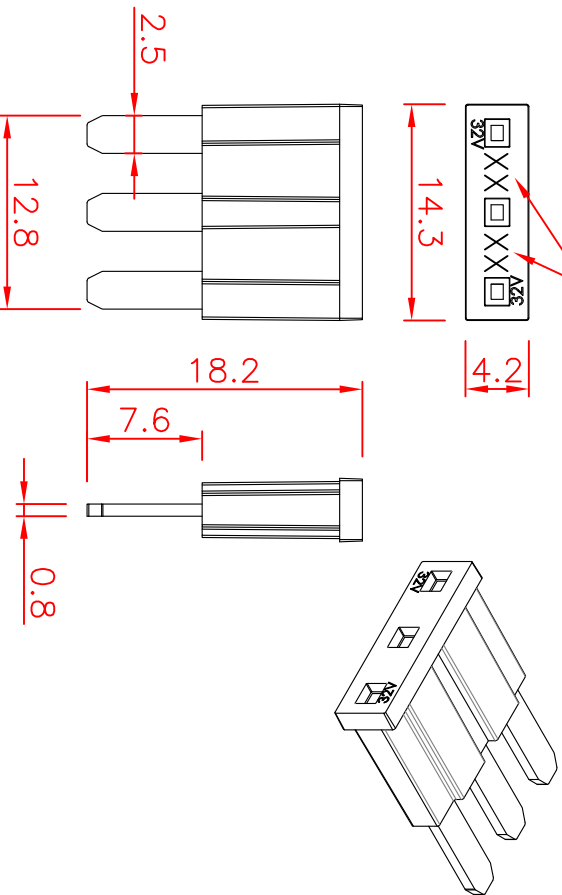

**Time-Current Characteristics :**

% of Ampere Rating	Opening Time
110%	100 hours Min
135%	0.75 sec. Min ; 120 sec. Max
160%	0.3 sec. Min ; 50 sec. Max
200%	0.15 sec. Min ; 5 sec. Max
350%	0.04 sec. Min ; 0.5 sec. Max
600%	0.02 sec. Min ; 0.1 sec. Max

**Specification:**

Voltage Rating : 32 VDC  
 Interrupting Ratings: 1000A @ 32 VDC  
 Metal Material : Zinc Alloy  
 Housing Material : PA66  
 Ambient Temp. :-40°C ~ +125°C  
 Rating Marking : Hot Stamping

**Order Information :**

Part No.	Ampere(A)	Housing Color
1594 1500 202	5	Tan
1594 1750 202	7.5	Brown
1594 2100 202	10	Red
1594 2150 202	15	Blue

Tolerances : Unless Otherwise Specified			
Dimension	Critical To Function	General	
< 1	+/-0.02	+/-0.03	
1 ~ 8	+/-0.1	+/-0.2	
8 ~ 24.995	+/-0.15	+/-0.25	
25 ~ 99.99	+/-0.2	+/-0.3	
Angles	+/-1°	+/-5°	
Rev	EN	Description	Dwg Ckd Appd Date
B	93092401	Modify the tolerance	Kao Chyi Ku 2004/9/24

Material	Drawn	Title:	Dwg Size	Sht	1	of	1	Rev
	Check							
Finish	Engr	Tiny 3(Micro3) Blade Fuse	A4	GTQD-FUS-1594	B			
	Appd							
Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010) Scale:								
Model File Name : Tiny 3(Micro3) Blade Fuse								
Drawing File Name : GTQD-FUS-1594								
Part Number : 1594 xxxx 202			Date:					2017/3/14

**GLORYTECH TECHNOLOGY CO., LTD.**