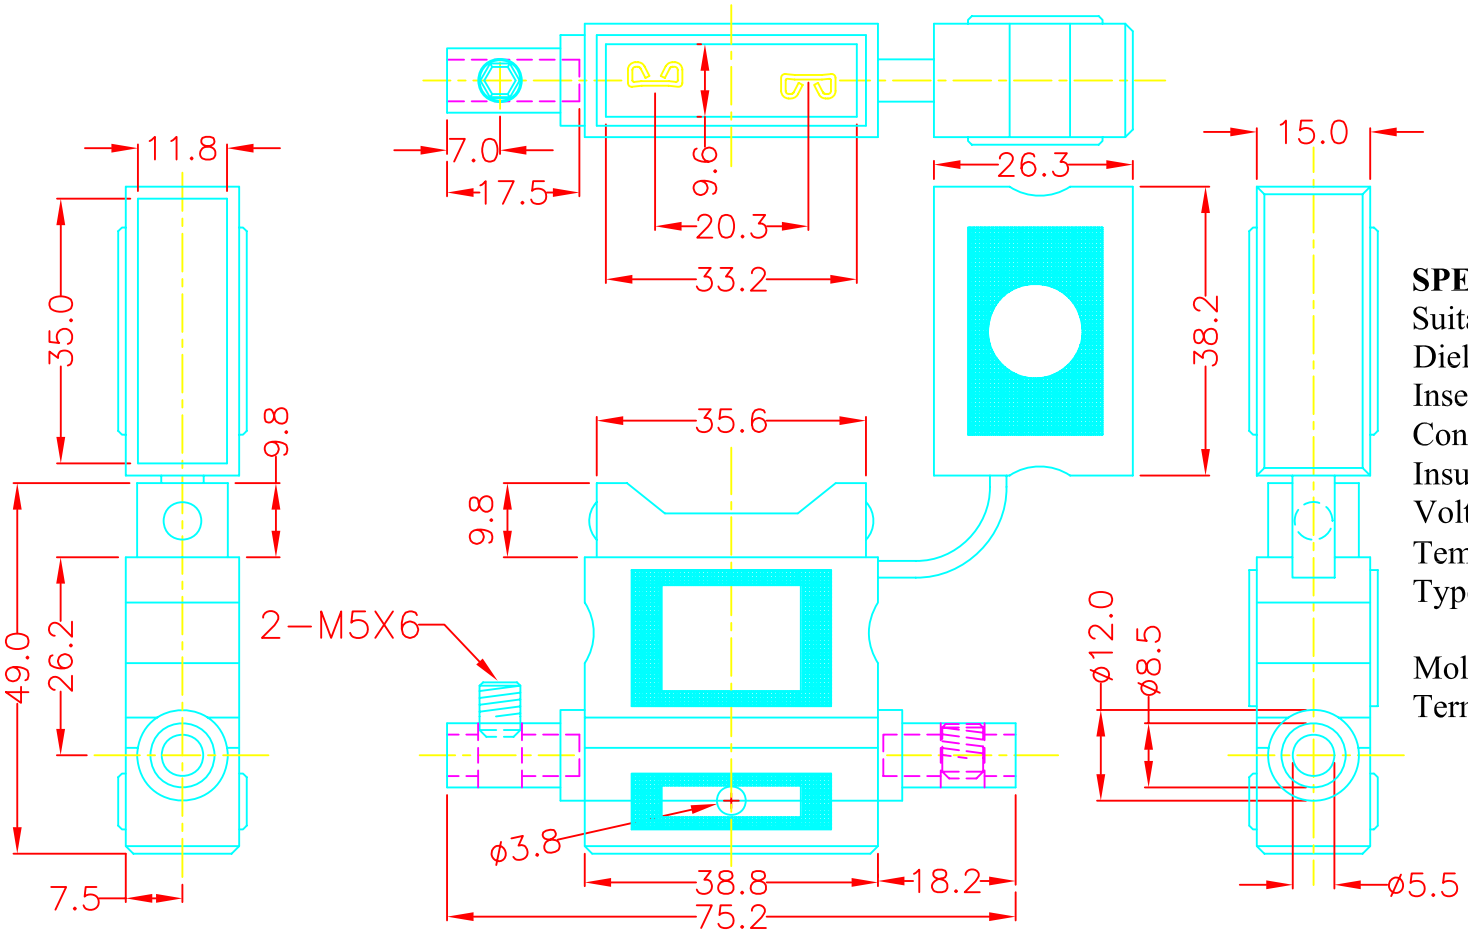

SPECIFICATIONS:

Suitable Rated Current : 80A Max.
Dielectric Strength for 60 Seconds : AC 3000V Min
Insertion & Extraction Force : 1kg. Min
Contact Resistance at 1A DC : 5mΩ Max.
Insulation Resistance at 500V DC : 100MΩ Min.
Voltage Drop : 20mV Max.
Temperature Rise : 50℃ Max.
Type : Screw Type , Water Resistant
, No Crimping Required
Molded Parts : P.V.C.
Terminals : Brass, Accept Wire #8-12 AWG

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/-0.02	+/-0.03
1 ~ 8	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- 5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material	Drawn		GLORYTECH TECHNOLOGY CO., LTD.		
	Check				
Finish	Engr		Title: In-Line Fuse Holder	A	GTQD-HLD-1822-2902	B
	Appd				
Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)			Scale: 1:1	Dwg Size	Sht 1 of 1	Rev
Model File Name : In-Line Fuse Holder for Max-Blade Type Fuses						
Drawing File Name : GTQD-HLD-1822-2902						
Part Number : 1822 2902 400				Date:	2004/9/24	

R04-001-1A