



#16-UL1015 Red Wire—135mm(5.3")

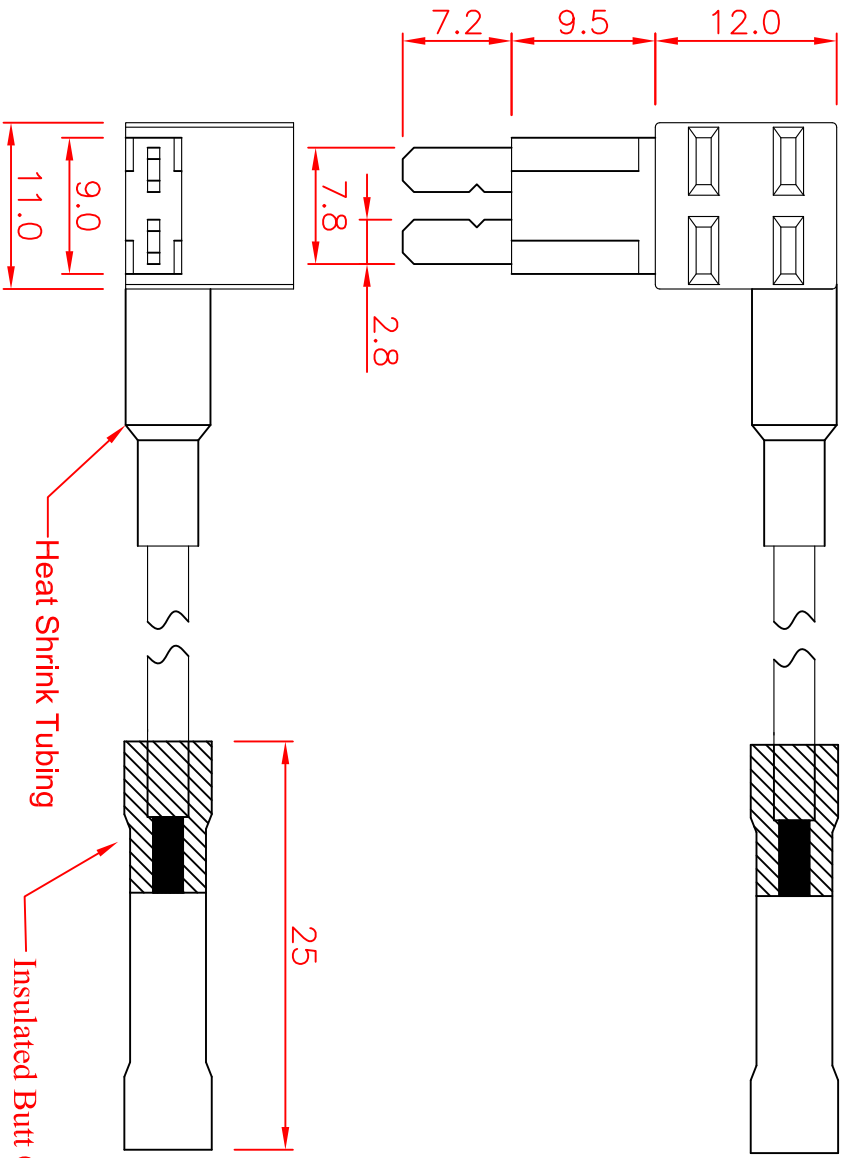

Heat Shrink Tubing

Insulated Butt Connector ; PVC PIPE ; Blue

**SPECIFICATIONS :**  
 Suitable Rated Current : MAX. installation Rating up to 20A.  
 Dielectric Strength for 60 seconds : AC1500V Min.  
 Insertion & Extraction Force : 1Kg. Min.  
 Contact Resistance at 1A DC : 5mΩ Max.  
 Insulation Resistance at 500V DC : 100MΩ Min.  
 Voltage Drop : 20mV Max.  
 Temperature Rise : 50°C Max.  
 Molded Parts : Nylon PA66 UL 94V-0  
 Terminals : Brass with Tin Plated  
 Suitable Wire Gauge : #16 AWG UL 1015

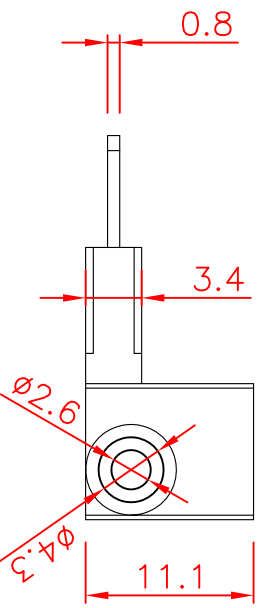

Tolerances : Unless Otherwise Specified	
Dimension	Critical To Function
< 1	+/-0.02
1 ~ 8	+/-0.1
8 ~ 24.995	+/-0.15
25 ~ 99.99	+/-0.2
Angles	+/-1°
Rev	EN
93092401	Modify the tolerance
	Dwg Kao
	Ckd Chyi
	Appd Ku
	Date 2004/9/24

Material		Material		Material	
Drawn	Check	Drawn	Check	Drawn	Check
Engnr	Appd	Engnr	Appd	Engnr	Appd
Finish		Finish		Finish	
Unless Otherwise Specified		Unless Otherwise Specified		Unless Otherwise Specified	
Dimensions are mm (inch)		Dimensions are mm (inch)		Dimensions are mm (inch)	
Tolerances:		Tolerances:		Tolerances:	
.x = 1.0 (.04)		.x = 1.0 (.04)		.x = 1.0 (.04)	
.xx = 0.5 (.02)		.xx = 0.5 (.02)		.xx = 0.5 (.02)	
.xxx = 0.25 (.010)		.xxx = 0.25 (.010)		.xxx = 0.25 (.010)	
Title:		Title:		Title:	
Tiny Fuse Tap		Tiny Fuse Tap		Tiny Fuse Tap	
A4		A4		A4	
GTQD-HLD-1829-0901-400		GTQD-HLD-1829-0901-400		GTQD-HLD-1829-0901-400	
B		B		B	
Model File Name : Fuse Tap for Tiny Blade Fuse		Model File Name : Fuse Tap for Tiny Blade Fuse		Model File Name : Fuse Tap for Tiny Blade Fuse	
Drawing File Name : GTQD-HLD-1829-0901-400		Drawing File Name : GTQD-HLD-1829-0901-400		Drawing File Name : GTQD-HLD-1829-0901-400	
Part Number : 1829 0901 400		Part Number : 1829 0901 400		Part Number : 1829 0901 400	
Date:		Date:		Date:	
2013/9/4		2013/9/4		2013/9/4	

**GLORYTECH TECHNOLOGY CO., LTD.**