


SPECIFICATIONS :

- Suitable Rated Current : Maximum Installation Rating
 - Existing Circuit : 30A
 - Add-on Circuit : 20A
 - Dielectric Strength for 60 seconds : AC1500V Min.
 - Insertion & Extraction Force : 1Kg. Min.
 - Contact Resistance at 1A DC : 5mΩ Max.
 - Insulation Resistance at 500V DC : 100MΩ Min.
 - Voltage Drop : 20mV Max.
 - Temperature Rise : 50°C Max.
 - Molded Parts : Nylon PA66 UL 94V-0, Red
 - Terminals : Brass with Tin Plated
 - Wire : #16 AWG UL 1015 Red Wire
- **Other color option is available for "Molded Parts" and "Wire"

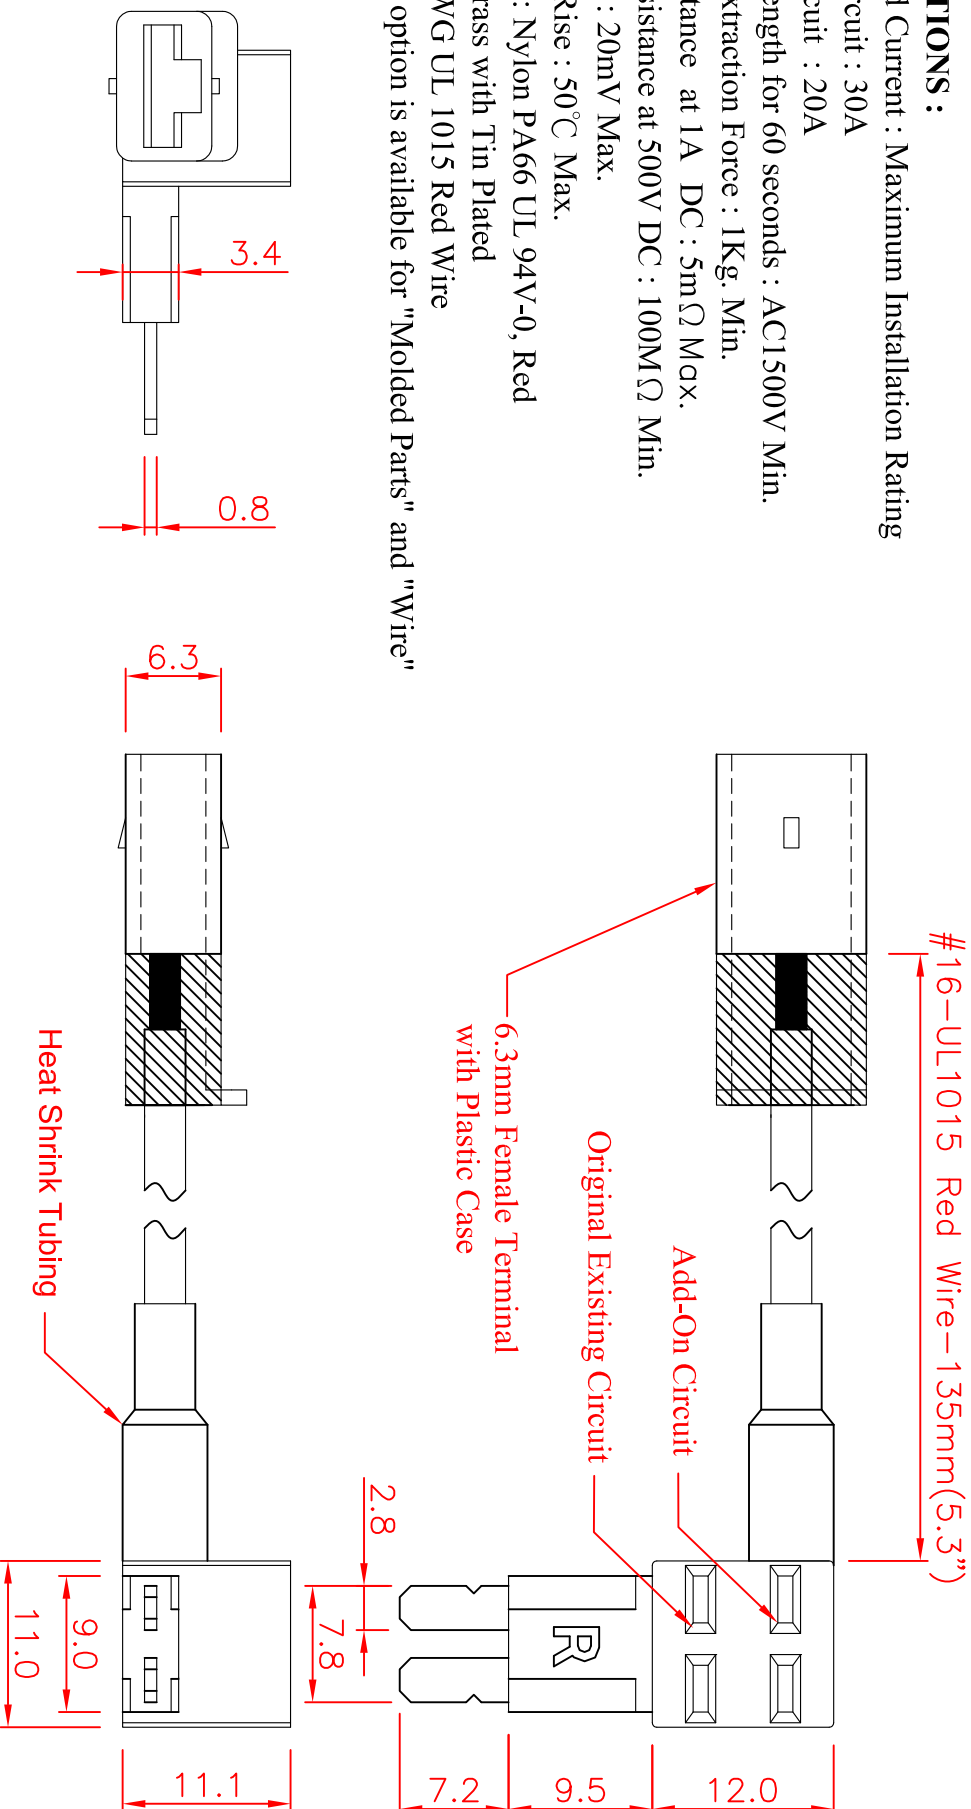

Tolerances : Unless Otherwise Specified	
Dimension	Critical To Function
< 1	+/- 0.02
1 ~ 8	+/- 0.1
8 ~ 24.995	+/- 0.15
25 ~ 99.99	+/- 0.2
Angles	+/- 1°
Rev	EN
93092401	Modify the tolerance
	Kao
	Chyi
	Ku
	2004/9/24
	Description
	Dwg
	Ckd
	Appd
	Date

Material		Drawn		Title:		Dwg		Sht		of		Rev	
Check		Engr		Tiny Fuse (Micro 2)Tap		Size		1		1		1	
Appd		Appd		(Right Side Insert Fuse)		A4		1		1		1	
Unless Otherwise Specified Dimensions are mm (inch)		Tolerances:		Scale:		2:1		1		1		1	
.x = 1.0 (.04)		.xx = 0.5 (.02)		.xxx = 0.25 (.010)				1		1		1	
Model File Name : Fuse Tap for Tiny Blade Fuse ; #16 AWG Wire ; Right Side Insert													
Drawing File Name : GTQD-HLD-1829-0902-401													
Part Number : 1829 0902 401													
Date: 2015/7/7													

GLORYTECH TECHNOLOGY CO., LTD.