

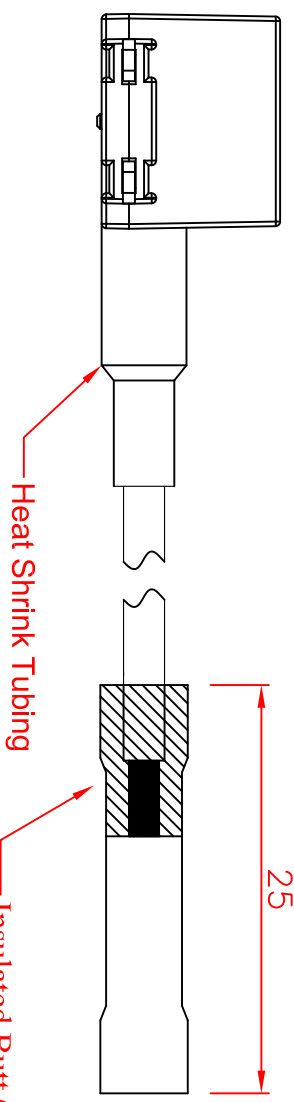


#14-UL1015 Red Wire-135mm(5.3")

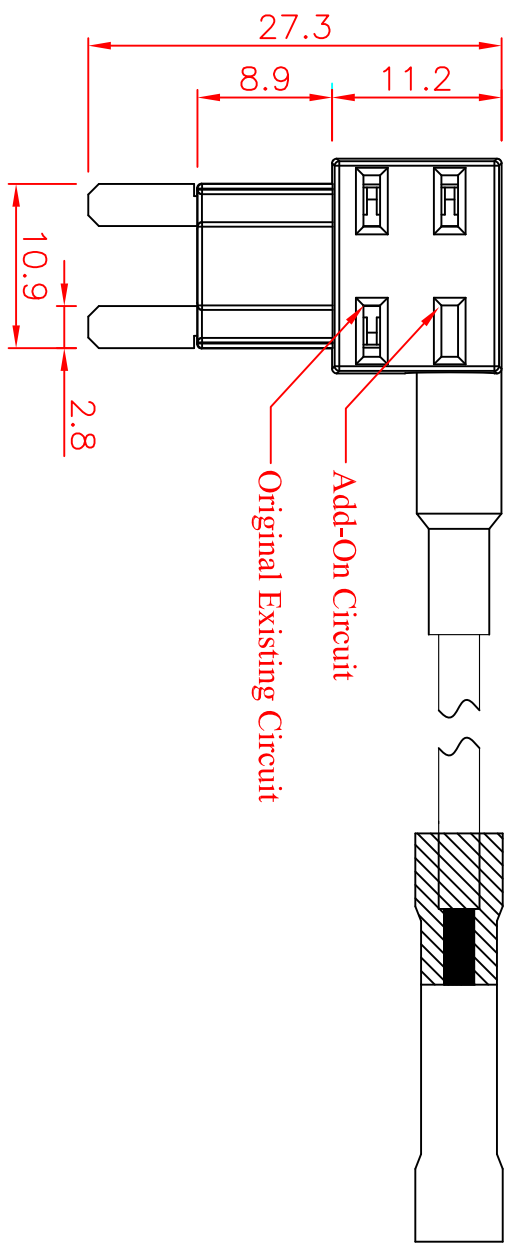

Heat Shrink Tubing
Insulated Butt Connector ; PVC PIPE

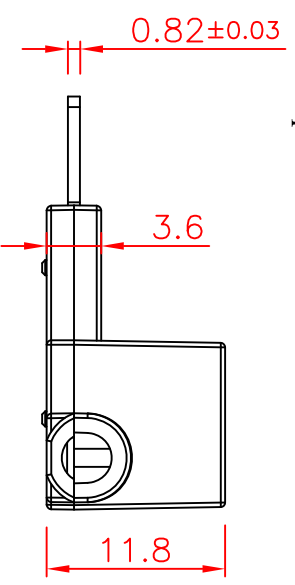

SPECIFICATIONS :

- Suitable Rated Current : Maximum Installation Rating
 - Existing Circuit : 30A
 - Add-on Circuit : 25A
 - Dielectric Strength for 60 seconds : AC1500V Min.
 - Insertion & Extraction Force : 1Kg. Min.
 - Contact Resistance at 1A DC : 5mΩ Max.
 - Insulation Resistance at 500V DC : 100MΩ Min.
 - Voltage Drop : 20mV Max.
 - Temperature Rise : 50°C Max.
 - Molded Parts : Nylon PA66 UL 94V-0, Black
 - Terminals : Brass with Tin Plated
 - Wire : #14 AWG UL 1015 Red Wire, End With Insulated Crimp-Type coupler Blue Butt Connector.
- **Other color option is available for "Molded Parts" and "Wire"

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/- 0.02	+/- 0.03
1 ~ 8	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- 5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material	Drawn	Title:	A4	GTQD-HLD-1829-1107-400	B
	Check				
Finish	Engr	Mini Blade Fuse Tap (Left Side Insert Fuse)			
	Appd				
Unless Otherwise Specified Dimensions are mm (inch)					
Tolerances:					
.x = 1.0 (.04)					
.xx = 0.5 (.02)					
.xxx = 0.25 (.010)					
Scale: 2:1					
Model File Name : Mini Blade Fuse Tap ; #14AWG ; Left Side Insert					
Drawing File Name : GTQD-HLD-1829-1107-400					
Part Number : 1829 1107 400					
Date:					
					2015/7/17

GLORYTECH TECHNOLOGY CO., LTD.