
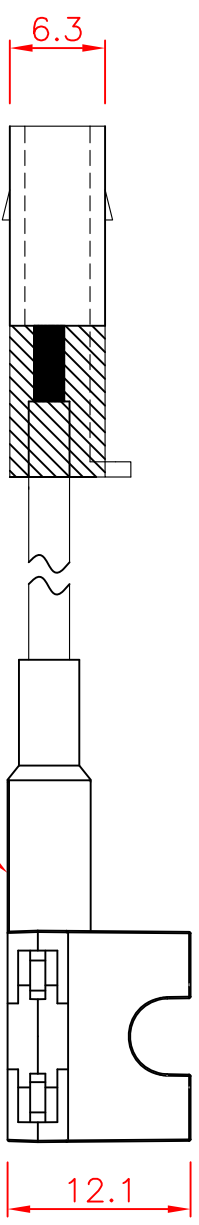
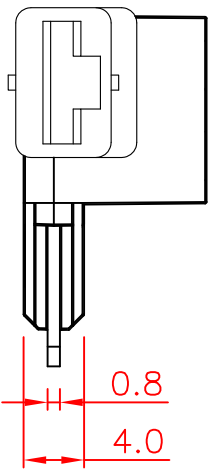


SPECIFICATIONS :

- Suitable Rated Current : Maximum Installation Rating
- Existing Circuit : 30A
- Add-on Circuit : 20A
- Dielectric Strength for 60 seconds : AC1500V Min.
- Insertion & Extraction Force : 1Kg. Min.
- Contact Resistance at 1A DC : 5mΩ Max.
- Insulation Resistance at 500V DC : 100MΩ Min.
- Voltage Drop : 20mV Max.
- Temperature Rise : 50°C Max.
- Molded Parts : Nylon PA66 UL 94V-0, Red
- Terminals : Brass with Tin Plated
- Wire : #16 AWG UL 1015 Red Wire.

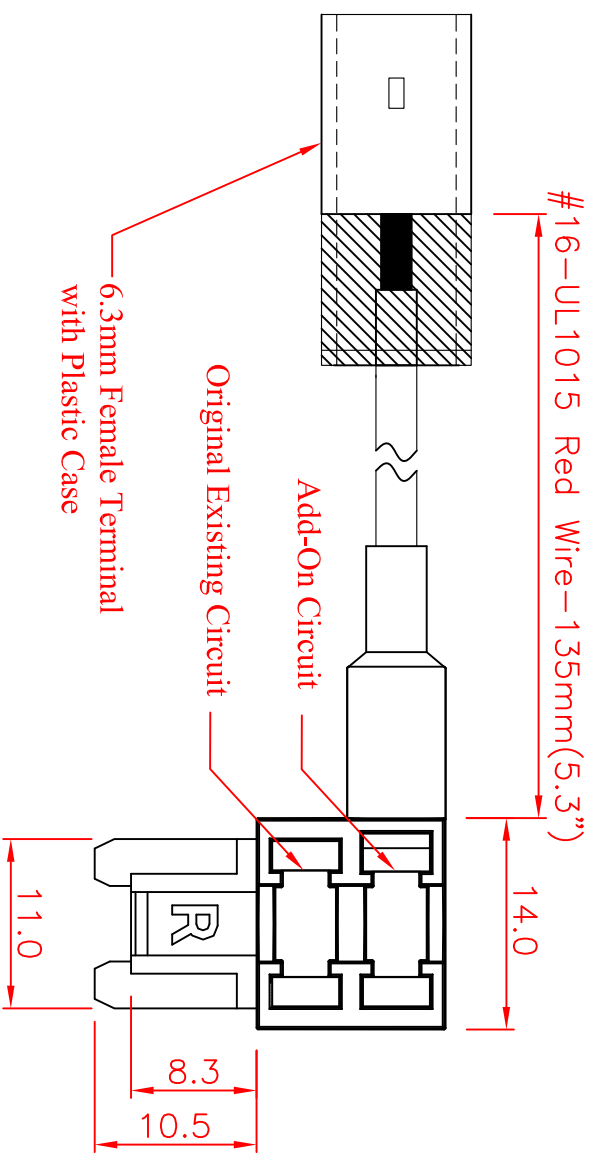

Tolerances : Unless Otherwise Specified						
Dimension	Critical To Function	General				
< 1	+/- 0.02	+/- 0.03				
1 ~ 8	+/- 0.1	+/- 0.2				
8 ~ 24.995	+/- 0.15	+/- 0.25				
25 ~ 99.99	+/- 0.2	+/- 0.3				
Angles	+/- 1°	+/- 5°				
Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

Material		Finish		Title:		Scale:		Dwg Size		Sht		Rev	
Drawn	Check	Engr	Appd	Low Profile Fuse Tap (Right Side Insert Fuse)		A4		GTQD-HLD-1829-1111-401		1 of 1		B	
				Unless Otherwise Specified Dimensions are mm (inch)		Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)		2:1					
Model File Name : Low Profile Fuse Tap ; #16AWG ; Right Side Insert													
Drawing File Name : GTQD-HLD-1829-1111-401													
Part Number : 1829 1111 401												Date: 2015/5/6	

GLORYTECH TECHNOLOGY CO., LTD.