



#18-UL1015 Red Wire—135mm(5.3")

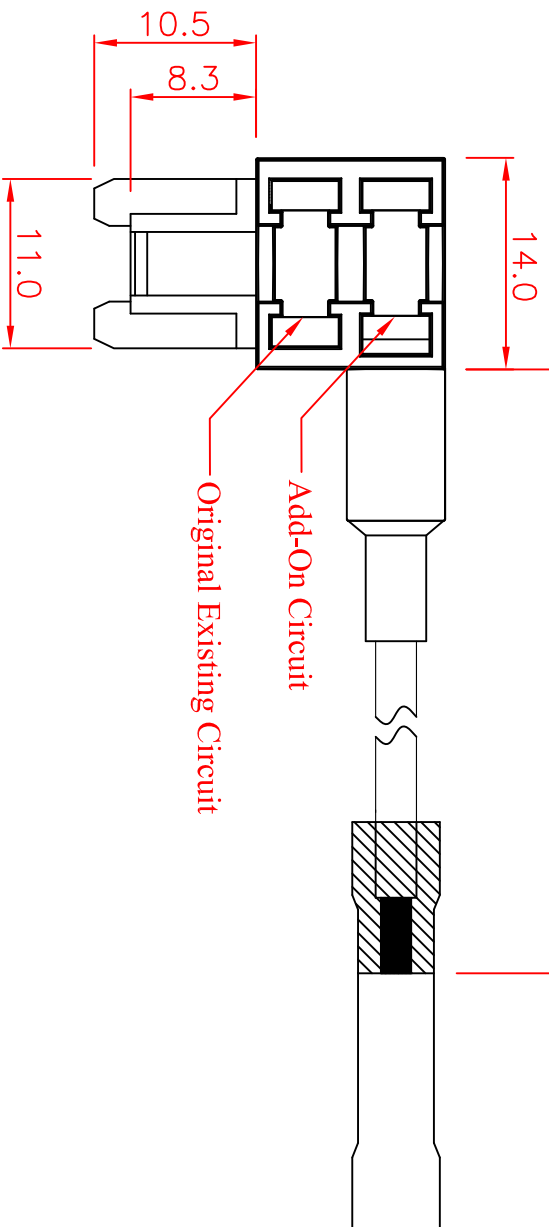

SPECIFICATIONS :

- Suitable Rated Current : Maximum Installation Rating
- Existing Circuit : 30A
- Add-on Circuit : 15A
- Dielectric Strength for 60 seconds : AC1500V Min.
- Insertion & Extraction Force : 1Kg. Min.
- Contact Resistance at 1A DC : 5mΩ Max.
- Insulation Resistance at 500V DC : 100MΩ Min.
- Voltage Drop : 20mV Max.
- Temperature Rise : 50°C Max.
- Molded Parts : Nylon PA66 UL 94V-0, Black
- Terminals : Brass with Tin Plated
- Wire : #18 AWG UL 1015 Red Wire, End With Insulated Crimp-Type coupler Blue Butt Connector.
- **Other color option is available for "Molded Parts" and "Wire"

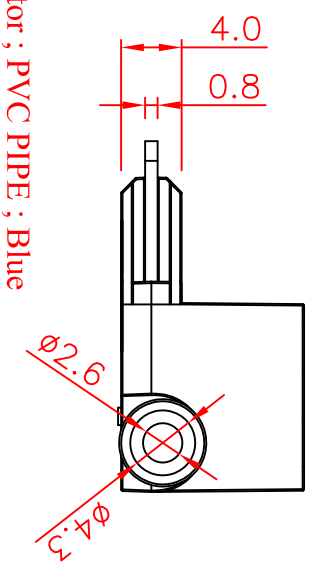

Tolerances : Unless Otherwise Specified			
Dimension	Critical To Function	General	
< 1	+/-0.02	+/-0.03	
1 ~ 8	+/- 0.1	+/- 0.2	
8 ~ 24.995	+/- 0.15	+/- 0.25	
25 ~ 99.99	+/- 0.2	+/- 0.3	
Angles	+/- 1°	+/- 5°	
Rev	EN	Description	Dwg Ckd Appd Date
B	93092401	Modify the tolerance	Kao Chyi Ku 2004/9/24

Material	Drawn	GLORYTECH TECHNOLOGY CO., LTD. Title: Low Profile Fuse Tap (Left Side Insert Fuse)		
	Check			
Finish	Engr	Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)	Scale: 2:1	Dwg Size
	Appd			
Model File Name : Low Profile Fuse Tap ; #18AWG ; Left Side Insert Drawing File Name : GTQD-HLD-1829-1116-400 Part Number : 1829 1116 400		A4	GTQD-HLD-1829-1116-400	B
		Date:	2015/5/6	Rev