

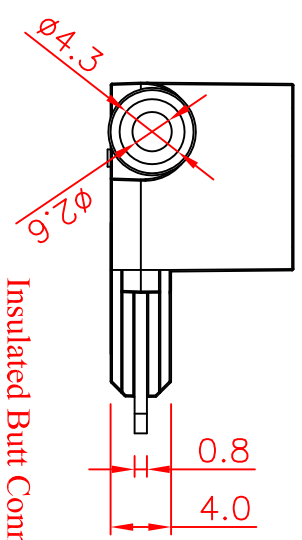


**SPECIFICATIONS :**

- Suitable Rated Current : Maximum Installation Rating
- Existing Circuit : 30A
- Add-on Circuit : 15A
- Dielectric Strength for 60 seconds : AC1500V Min.
- Insertion & Extraction Force : 1Kg. Min.
- Contact Resistance at 1A DC : 5mΩ Max.
- Insulation Resistance at 500V DC : 100MΩ Min.
- Voltage Drop : 20mV Max.
- Temperature Rise : 50°C Max.
- Molded Parts : Nylon PA66 UL 94V-0, Red
- Terminals : Brass with Tin Plated
- Wire : #18 AWG UL 1015 Red Wire, End With Insulated
- Crimp-Type coupler Blue Butt Connector.

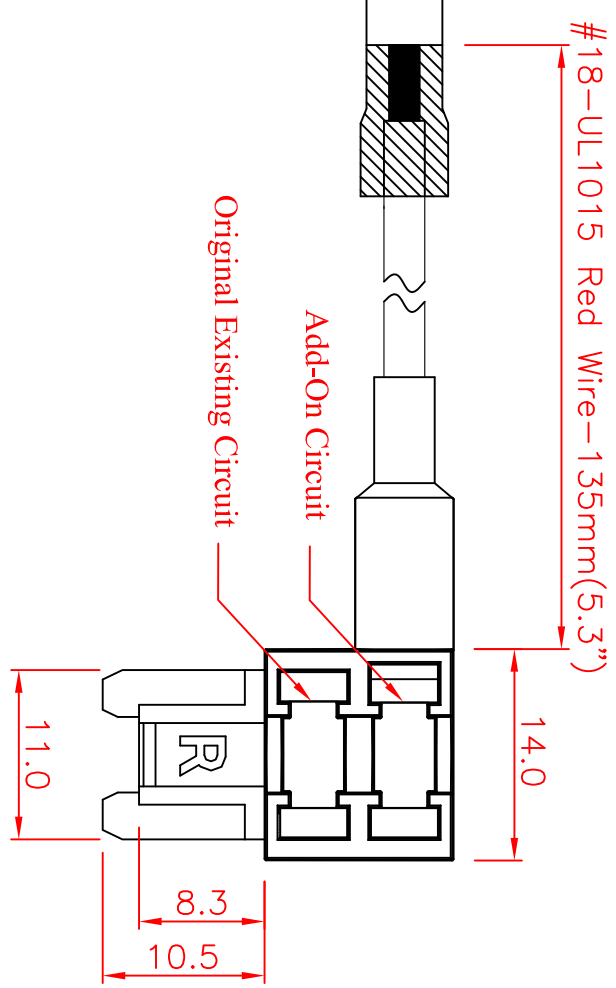

Insulated Butt Connector ; PVC PIPE ; Blue

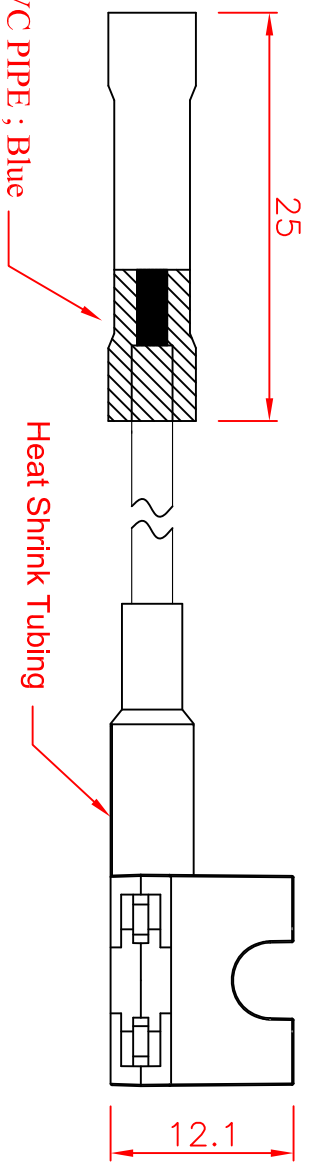

Heat Shrink Tubing

Tolerances : Unless Otherwise Specified			
Dimension	Critical To Function	General	
< 1	+/- 0.02	+/- 0.03	
1 ~ 8	+/- 0.1	+/- 0.2	
8 ~ 24.995	+/- 0.15	+/- 0.25	
25 ~ 99.99	+/- 0.2	+/- 0.3	
Angles	+/- 1°	+/- 5°	

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24

**GLORYTECH TECHNOLOGY CO., LTD.**

<b>Material</b>	Drawn Check	<b>Title:</b> Low Profile Fuse Tap (Right Side Insert Fuse)		<b>A4</b>	<b>GTQD-HLD-1829-1117-400</b>	<b>B</b>
<b>Finish</b>	Engr Appd	Unless Otherwise Specified Dimensions are mm (inch) Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)		<b>Scale:</b> 2:1	<b>Dwg Size</b> Sht 1 of 1	<b>Rev</b>
<b>Model File Name : Low Profile Fuse Tap ; #18AWG ; Right Side Insert</b>						
<b>Drawing File Name : GTQD-HLD-1829-1117-400</b>						
<b>Part Number : 1829 1117 400</b>				<b>Date:</b>	2015/5/6	