
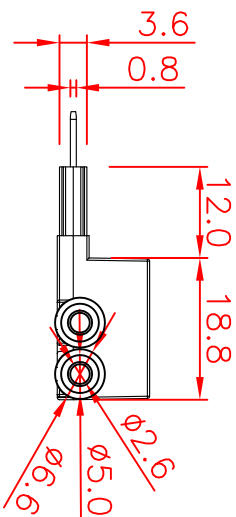
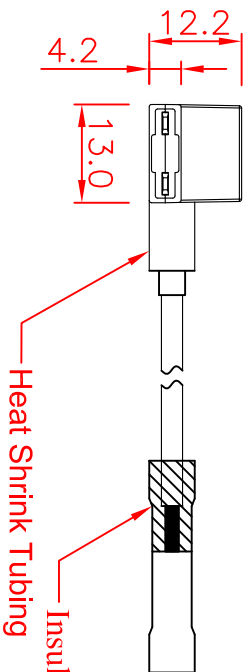



#16-UL1015 Red Wire-1.35mm(5.3")

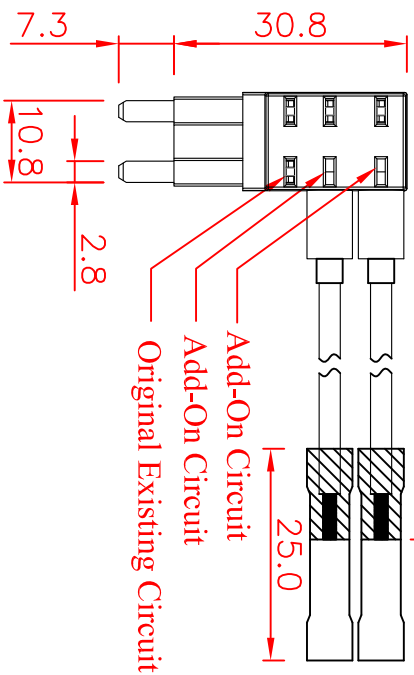

**SPECIFICATIONS :**

Suitable Rated Current : Maximum Installation Rating

- Existing Circuit : 30A

- Add-on Circuit : 20A

Dielectric Strength for 60 seconds : AC1500V Min.

Insertion & Extraction Force : 1Kg. Min.

Contact Resistance at 1A DC : 5mΩ Max.

Insulation Resistance at 500V DC : 100MΩ Min.

Voltage Drop : 20mV Max.

Temperature Rise : 50°C Max.

Molded Parts : Nylon with Glassfiber(UL 94V-0), Black

Terminals : Brass with Tin Plated

Wire : #16 AWG UL 1015 Red Wire, End With Insulated

Crimp-Type coupler Blue Butt Connector.

\*\*Other color option is available for "Molded Parts" and "Wire"

Tolerances : Unless Otherwise Specified	
Dimension	Critical To Function
< 1	+/-0.02
1 ~ 8	+/-0.1
8 ~ 24.995	+/-0.15
25 ~ 99.99	+/-0.2
Angles	+/-1°
Rev	EN
93092401	Modify the tolerance
	Dwg
	Kao
	Ckd
	Chyi
	Appd
	Ku
	Date
	2004/9/24

Material		Drawn		Title:	
Check		Engr		3 Circuits Mini Blade	
Appd		Appd		Fuse Tap	
Unless Otherwise Specified Dimensions are mm (inch)				A4	
Tolerances:				GTQD-HLD-1829-1119-400	
.x = 1.0 (.04)				Dwg	
.xx = 0.5 (.02)				Size	
.xxx = 0.25 (.010)				Sht	
Scale: 1:1				1 of 1	
Model File Name : 3 Circuit Mini Blade Fuse Tap ; #16AWG				Rev	
Drawing File Name : GTQD-HLD-1829-1119-400				Date:	
Part Number : 1829 1119 400				2017/7/12	

**GLORYTECH TECHNOLOGY CO., LTD.**