
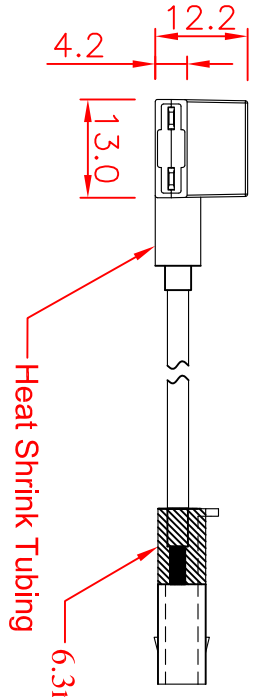
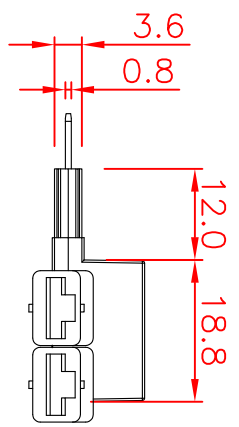



#16-UL1015 Red Wire—135mm(5.3")

23.2

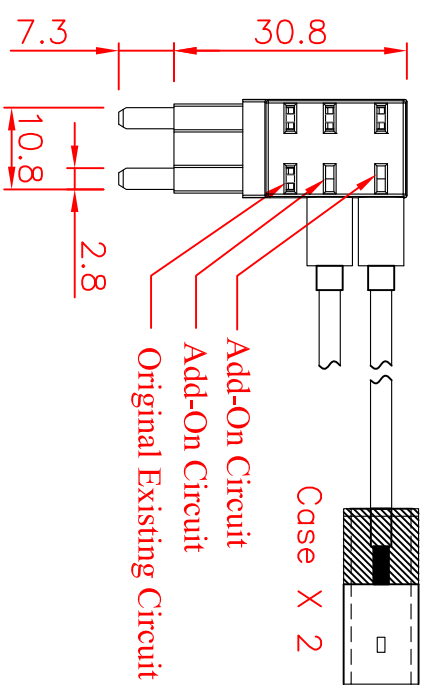

SPECIFICATIONS :

- Suitable Rated Current : Maximum Installation Rating
- Existing Circuit : 30A
- Add-on Circuit : 20A
- Dielectric Strength for 60 seconds : AC1500V Min.
- Insertion & Extraction Force : 1Kg. Min.
- Contact Resistance at 1A DC : 5mΩ Max.
- Insulation Resistance at 500V DC : 100MΩ Min.
- Voltage Drop : 20mV Max.
- Temperature Rise : 50°C Max.
- Molded Parts : Nylon with glassfiber(UL 94V-0), Black
- Terminals : Brass with Tin Plated
- Wire : #16 AWG UL 1015 Red Wire
- **Other color option is available for "Molded Parts" and "Wire"

GLORYTECH TECHNOLOGY CO., LTD.

Material	Drawn	
	Check	
Finish	Engr	
	Appd	
Title:		
3 Circuits Mini Blade Fuse Tap		
A4	GTQD-HLD-1829-1119-401	B

Tolerances : Unless Otherwise Specified

Dimension	Critical To Function	General
< 1	+/- 0.02	+/- 0.03
1 ~ 8	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- 5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
-----	----	-------------	-----	-----	------	------

B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24
---	----------	----------------------	-----	------	----	-----------

Model File Name : 3 Circuit Mini Blade Fuse Tap ; #16AWG		Scale:	1:1	Dwg Size	Sht	1	of	1	Rev
Drawing File Name : GTQD-HLD-1829-1119-401									
Part Number : 1829 1119 401									

Date:		2017/7/12
-------	--	-----------