
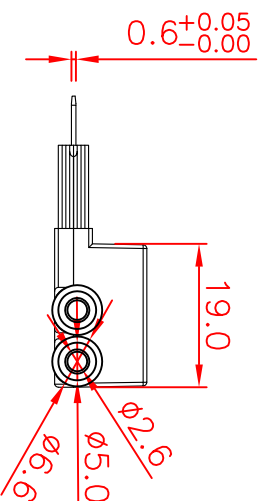



#14-UL1015 Red Wire-127mm(5")

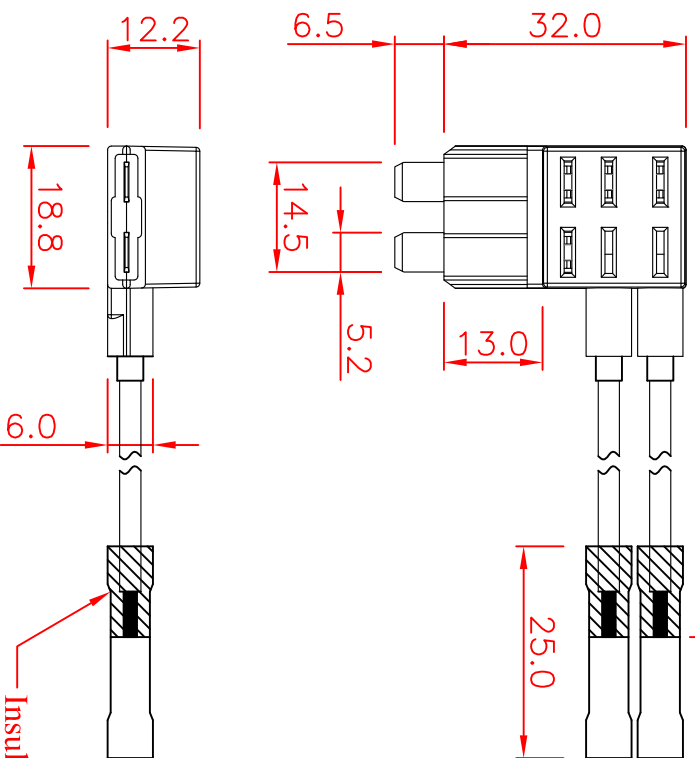

Insulated Butt Connector ; PVC PIPE

SPECIFICATIONS :

- Suitable Rated Current : Maximum Installation Rating
- Existing Circuit : 30A
- Add-on Circuit : 25A
- Dielectric Strength for 60 seconds : AC1500V Min.
- Insertion & Extraction Force : 1Kg. Min.
- Contact Resistance at 1A DC : 5mΩ Max.
- Insulation Resistance at 500V DC : 100MΩ Min.
- Voltage Drop : 20mV Max.
- Temperature Rise : 50°C Max.
- Molded Parts : Nylon with glassfiber(UL 94V-0), Black
- Terminals : Brass with Tin Plated
- Wire : #14 AWG UL 1015 Red Wire, End With Insulated Crimp-Type coupler Blue Butt Connector.
- **Other color option is available for "Molded Parts" and "Wire"

GLORYTECH TECHNOLOGY CO., LTD.

Material	Drawn	
	Check	
Finish	Engr	
	Appd	

Unless Otherwise Specified
Dimensions are mm (inch)

Title:
3 Circuits Blade Fuse

A4 GTQD-HLD-1829-1921-400

B

Tolerances:
.x = 1.0 (.04)
.xx = 0.5 (.02)
.xxx = 0.25 (.010)

Scale:	1:1	Dwg Size	Sht	1	of	1	Rev	
--------	-----	----------	-----	---	----	---	-----	--

Model File Name : 3 Circuits Blade Fuse Tap ; #14AWG
Drawing File Name : GTQD-HLD-1829-1921-400

Part Number : 1829 1921 400	Date:	2017/7/11
-----------------------------	-------	-----------

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/- 0.02	+/- 0.03
1 ~ 8	+/- 0.1	+/- 0.2
8 ~ 24.995	+/- 0.15	+/- 0.25
25 ~ 99.99	+/- 0.2	+/- 0.3
Angles	+/- 1°	+/- .5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24