


#14-UL1015 Red Wire-127mm(5")

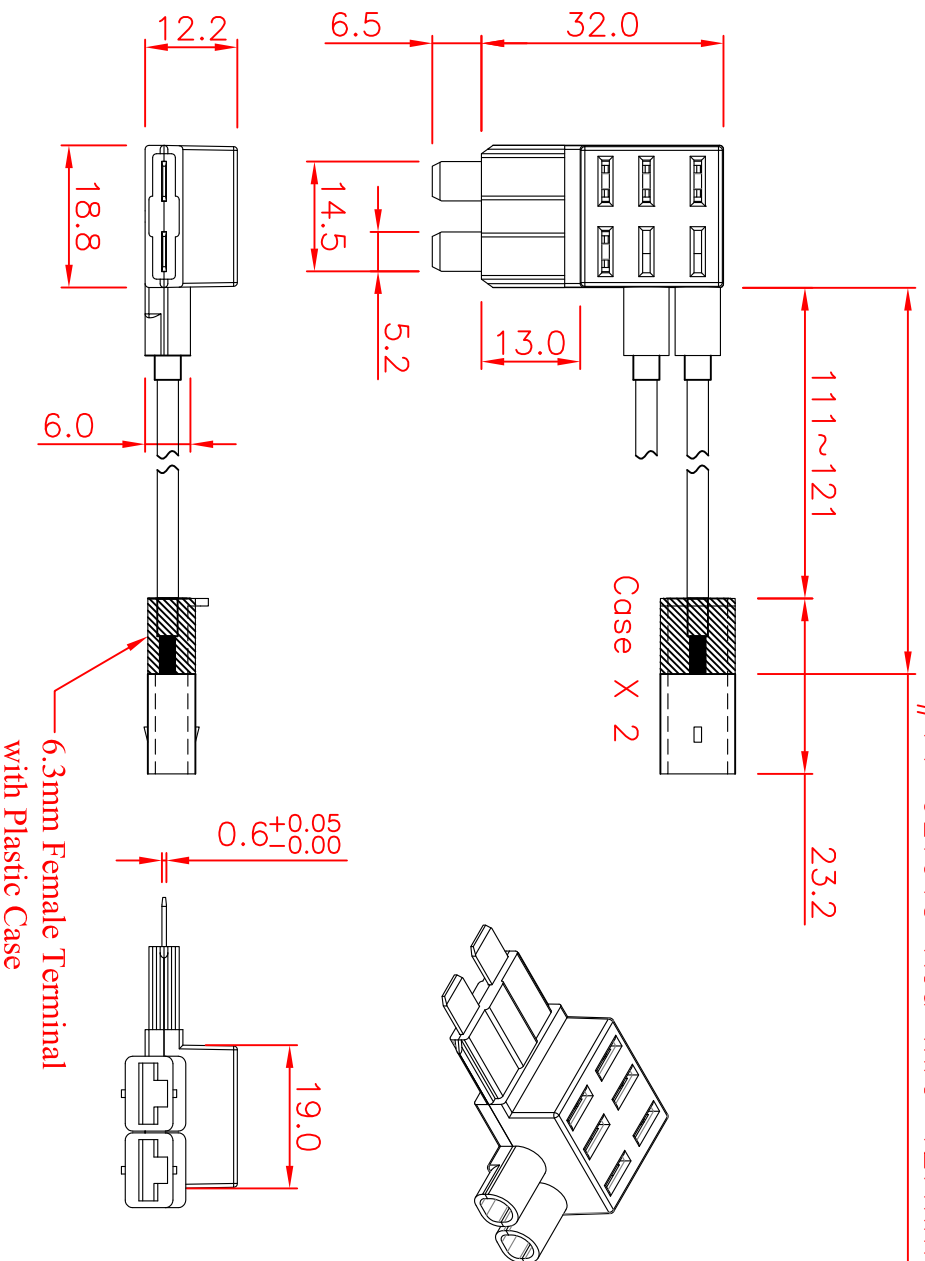

**SPECIFICATIONS :**

- Suitable Rated Current : Maximum Installation Rating
- Existing Circuit : 30A
- Add-on Circuit : 25A
- Dielectric Strength for 60 seconds : AC1500V Min.
- Insertion & Extraction Force : 1Kg. Min.
- Contact Resistance at 1A DC : 5mΩ Max.
- Insulation Resistance at 500V DC : 100MΩ Min.
- Voltage Drop : 20mV Max.
- Temperature Rise : 50°C Max.
- Molded Parts : Nylon with glassfiber(UL 94V-0), Black
- Terminals : Brass with Tin Plated
- Wire : #14 AWG UL 1015 Red Wire
- \*\*Other color option is available for "Molded Parts" and "Wire"

Tolerances : Unless Otherwise Specified			
Dimension	Critical To Function	General	
< 1	+/-0.02	+/-0.03	
1 ~ 8	+/-0.1	+/-0.2	
8 ~ 24.995	+/-0.15	+/-0.25	
25 ~ 99.99	+/-0.2	+/-0.3	
Angles	+/- 1°		
Rev	EN	Description	Dwg Ckd Appd Date
B	93092401	Modify the tolerance	Kao Chyi Ku 2004/9/24

Material	Drawn	<p><b>GLORYTECH TECHNOLOGY CO., LTD.</b></p> <p><b>Title:</b> 3 Circuits Blade Fuse</p> <p><b>Tap</b></p> <p>Unless Otherwise Specified Dimensions are mm (inch)</p> <p>Tolerances: .x = 1.0 (.04) .xx = 0.5 (.02) .xxx = 0.25 (.010)</p>		
	Check			
Finish	Engr	A4	GTQD-HLD-1829-1921-401	B
	Appd			
Model File Name : 3Circuits Blade Fuse Tap ; #14AWG		Dwg Size	Sht	1 of 1
Drawing File Name : GTQD-HLD-1829-1921-401		Scale: 1:1	Date:	2017/7/11
Part Number : 1829 1921 401				