

SPECIFICATIONS:


Rating : 60A Max. 12/24/32VDC

Insulation Resistance : DC 500V 100M ohm Min.

Dielectric Strength : AC 1000V 1 minute

Operation Temperature : -25°C ~ +85°C

Fuse Rating	Wire AWG
20A	12AWG
30A	10AWG
40A	8AWG
50A	8AWG
60A	6AWG

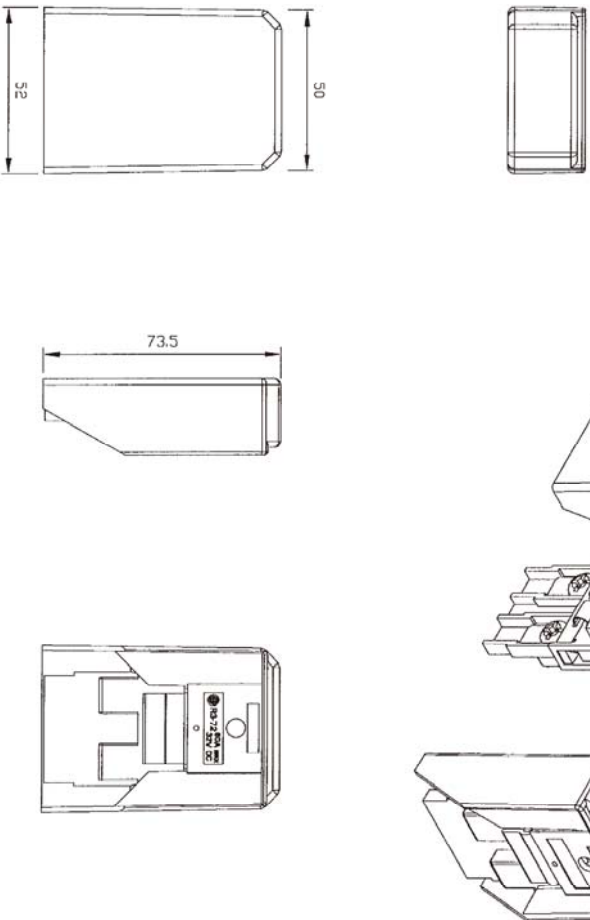

Material

Frame : Nylon 66FR7025, Black

Cover : PP#366

Terminal : Copper

Nut : Nickel Plated Metal

Screw : M5*0.8 ; L=5.8mm

GLORYTECH TECHNOLOGY CO., LTD.

Material	Drawn	Title:	Dwg Size	Sht	of	Rev
	Check					
Finish	Engr	Fuse Holder with Cover	A4	1	1	B
	Appd					

Unless Otherwise Specified
Dimensions are mm (inch)

Tolerances:

.x = 1.0 (.04)

.xx = 0.5 (.02)

.xxx = 0.25 (.010)

Scale:	Dwg Size	Sht	of	Rev
		1	1	

Model File Name : Fuse Holder with Cover ; For Max Blade Fuses

Drawing File Name : GTQD-HLD-1837-2902

Part Number : 1837 2902 000

Date: 2018/1/15

Tolerances : Unless Otherwise Specified		
Dimension	Critical To Function	General
< 1	+/-0.02	+/-0.03
1 ~ 8	+/-0.1	+/-0.2
8 ~ 24.995	+/-0.15	+/-0.25
25 ~ 99.99	+/-0.2	+/-0.3
Angles	+/-1°	+/-5°

Rev	EN	Description	Dwg	Ckd	Appd	Date
B	93092401	Modify the tolerance	Kao	Chyi	Ku	2004/9/24