


# Stud Type Circuit Breaker

Part No. **1528** series



- Automatic Reset Type Circuit Breaker
- Voltage Rating: 6-24 V
- Ampere Rating: 10A, 15A, 20A, 25A, 30A, 40A, 50A

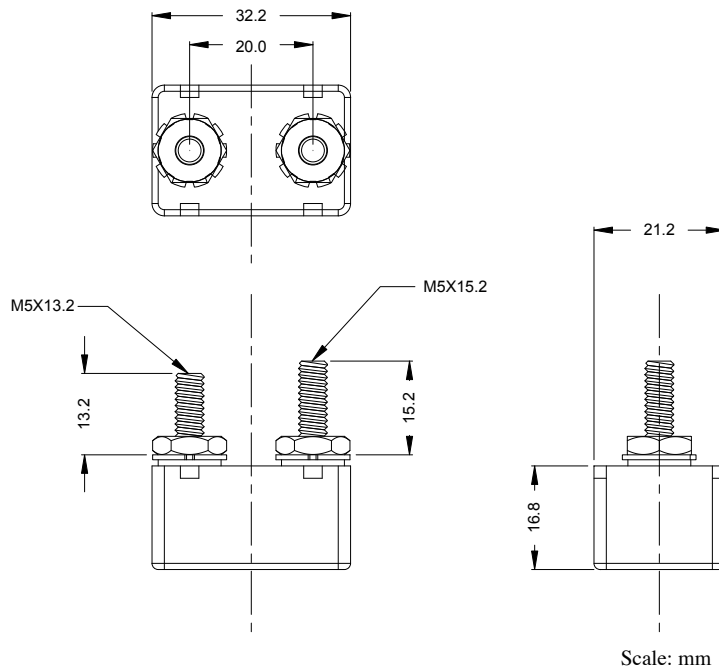

## Specifications

Description	Cycles on-off when load is excessive; Stud terminals
Breaker Type	Type I
Voltage	6-24V DC
Amperes	10-50 A
Terminals	Threaded studs (2) with nut
Terminal Size	10-32 Thread
Ambient Temperature Range	-40°C ~ +80°C
Housing Style	Plated steel case, without bracket
Mounting Method	Stud mounted breakers
Usage	Battery chargers, trucks, buses, RV's, trolling motors, etc
Application	Automotive headlamp, power windows, seats & locks
Standard	Complies with SAE J553

## Ordering Information:

Part Number	Ampere (A)	Voltage (VDC)
15282100000	10 A	6-24 V
15282150000	15 A	6-24 V
15282200000	20 A	6-24 V
15282250000	25 A	6-24 V
15282300000	30 A	6-24 V
15282400000	40 A	6-24 V
15282500000	50 A	6-24 V

## Electrical:

% Of Ampere Rating	Ampere Rating	Opening Time
100 %	10-50 A	60 Minutes, <b>Min.</b>
135 %	10-50 A	60 Minutes, <b>Max.</b>
200 %	10-50 A	1 Minute, <b>Max.</b>